

## 1112-1 2" Wide General Purposes Caster Series

MRC Wheel (Transparent) Wheel Diameter × Wheel Width 200 × 50mm

D

KS-11120800071013

Rigid Casters, Welded Caster Fork, black painted finish. Base plate Mounting Type, 85x70mm Bolt Hole Spacing. Reinforced Polypropylene (PA6), natural finish. Bearings —Ball Bearings, with metal caps.

Wheel surface: Thermoplastic (PA6)

Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data


Imperial  Metric

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 8 "                       |
| Wheel Width             | 2 "                       |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 4-9/16 " x 4 "            |
| Bolt Hole Spacing       | 3-3/8 " x 2-3/4 "         |
| Plate Hole              | 13/16 " x 3/8 "           |
| Overall Height          | 9-1/2 "                   |
| Hardness Of Tread       | 75±5° Shore D             |
| Load Capacity (Dynamic) | 882lbs                    |
| Load Capacity (Static)  | 1323lbs                   |
| Temperature             | -4°F to +176°F            |
| Fork Type               | Rigid Caster              |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 6.6lbs                    |
| Standard                | ISO22883                  |


### Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

### Dimensions

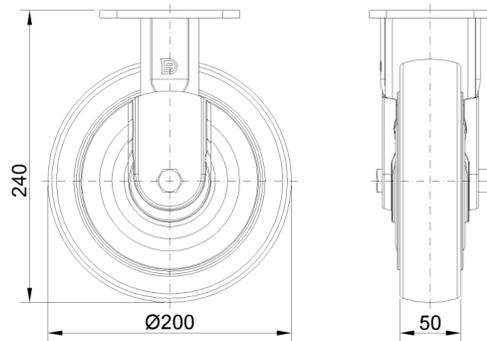

### Mounting

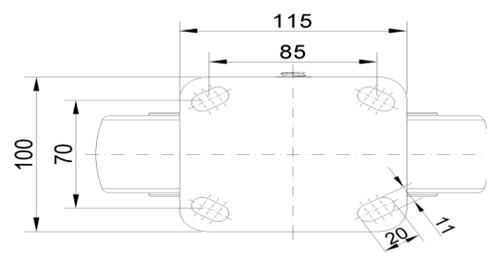

\* For any deviation between metric and imperial spec, please refer to the metric spec.