

## 1112-1 2" Wide General Purposes Caster Series

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


A

KS-11120800531123

Rigid Casters, Welded Caster Fork, black paint finish. Base plate Mounting Type device, 85x70mm Bolt Hole Spacing. Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown. Bearings—Ball Bearings, with iron caps.

Wheel Tread: Hhigh-Quality Polyurethane  
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

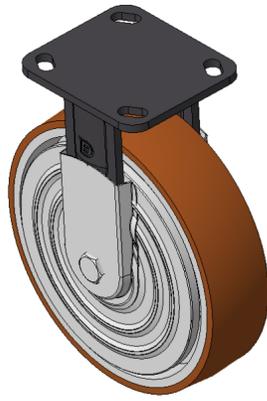

Picture may differ from original product

### Technical Data


Metric  Imperial

|                         |                           |
|-------------------------|---------------------------|
| Wheel Diameter          | 200mm                     |
| Wheel Width             | 50mm                      |
| Wheel Bearing           | Wheels With Ball Bearings |
| Plate Size              | 115 x 100mm               |
| Bolt Hole Spacing       | 85 x 70mm                 |
| Plate Hole              | 20 x 11mm                 |
| Overall Height          | 240mm                     |
| Hardness Of Tread       | 92±5° Shore A             |
| Load Capacity (Dynamic) | 700kgs                    |
| Load Capacity (Static)  | 1050kgs                   |
| Temperature             | -20°C to +70°C            |
| Fork Type               | Rigid Caster              |
| Stainless               | N/A                       |
| Electrical Conductivity | N/A                       |
| Anti-Static             | N/A                       |
| Weight                  | 4.34kgs                   |
| Standard                | ISO22883                  |


### Advantages at a glance

|                            |       |
|----------------------------|-------|
| Rolling Resistance         | ••••• |
| Operating Noise            | ••••• |
| Floor Surface Preservation | ••••• |

### Dimensions

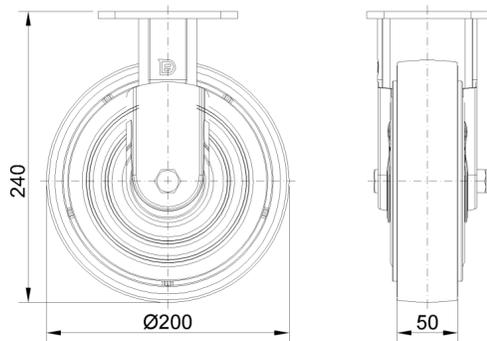

### Mounting

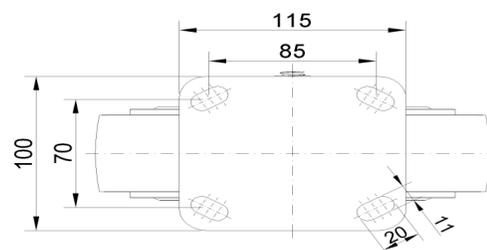

\* For any deviation between metric and imperial spec, please refer to the metric spec.