

## 1112-1 2" Wide General Purposes Caster Series

WMRC (Transparent) Wheel Diameter x Wheel Width 150 x 40mm


D

KS-11120801074031

Modible Casters, Welded Caster Fork, black paint finish  
 Plate Mounting Type, 85x70mm Bolt Hole Spacing  
 Reinforced Polypropylene (PA6), natural finish  
 Bearings—Ball Bearings, with metal caps

Wheel surface: Thermoplastic (PA6)  
 Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product

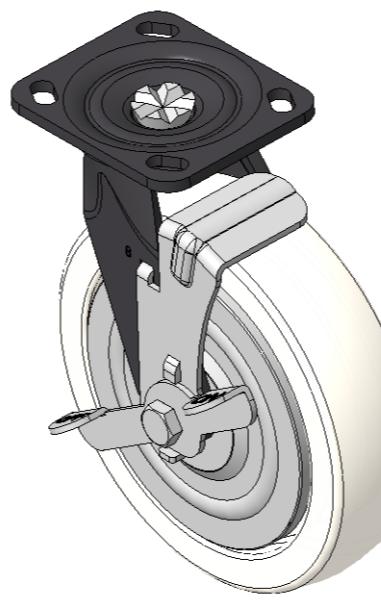

Picture may differ from original product

## Technical Data


Imperial  Metric

Wheel Diameter	6 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	4-9/16 " x 4 "
Bolt Hole Spacing	3-3/8 " x 2-3/4 "
Plate Hole	13/16 " x 3/8 "
Offset	1-3/8 "
Swivel Interference	9-1/8 "
Overall Height	7-1/2 "
Swivel Radius	4-9/16 "
Hardness Of Tread	75±5° Shore D
Load Capacity (Dynamic)	882lbs
Load Capacity (Static)	1323lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster With Directional Lock
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	7.7lbs
Standard	ISO22883


## Advantages at a glance

Rolling Resistance	• • • •
Operating Noise	• • ○ ○ ○
Floor Surface Preservation	• • ○ ○ ○

## Dimensions

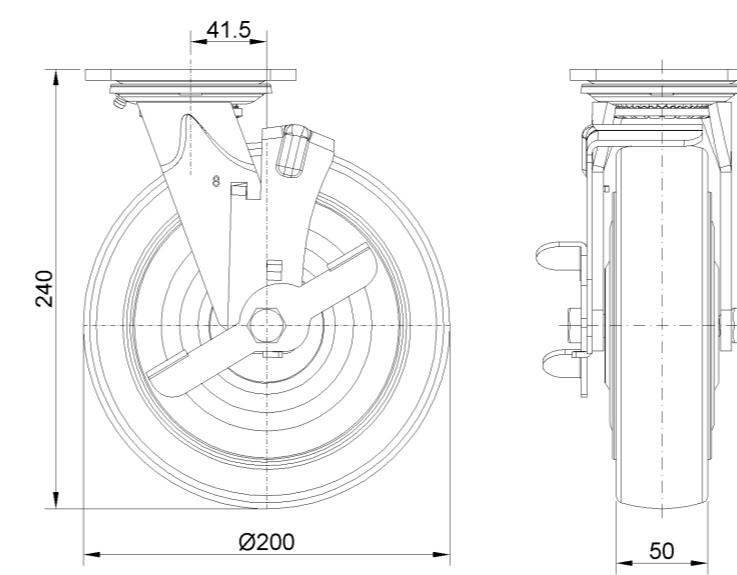

## Mounting

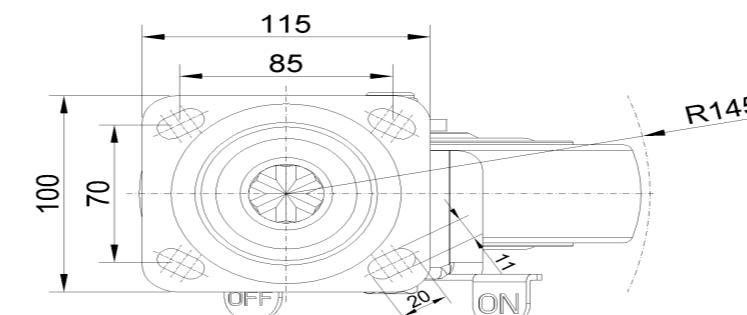

\* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2026 DershengInternational www.dersheng.com