



1112-1 2" Wide General Purposes Caster Series


PU (red round) Wheel Diameter x Wheel Width 150 x 45mm

A  
KS-11120801334041

Modible Casters, Welded Caster Fork, black painted finish  
Plate Mounting Type, 85x70mm Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red Bearings—Ball Bearings

Wheel Tread: Hhigh-Quality Polyurethane  
Wheel Center: Iron core / Cast iron core

Drawings are for reference only and may differ from the product

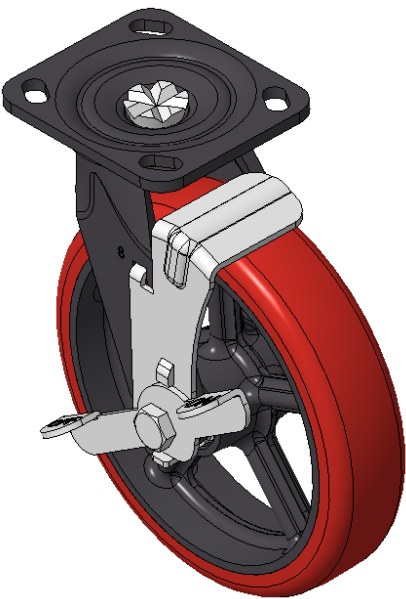

Picture may differ from original product


Technical Data

|                                                                        |                                     |
|------------------------------------------------------------------------|-------------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                     |
| Wheel Diameter                                                         | 6 "                                 |
| Wheel Width                                                            | 1-13/16 "                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings           |
| Plate Size                                                             | 4-9/16 " x 4 "                      |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "                   |
| Plate Hole                                                             | 13/16 " x 3/8 "                     |
| Offset                                                                 | 1-3/8 "                             |
| Swivel Interference                                                    | 9-1/8 "                             |
| Overall Height                                                         | 7-1/2 "                             |
| Swivel Radius                                                          | 4-9/16 "                            |
| Hardness Of Tread                                                      | 92±5° Shore A                       |
| Load Capacity (Dynamic)                                                | 661lbs                              |
| Load Capacity (Static)                                                 | 992lbs                              |
| Temperature                                                            | -4°F to +158°F                      |
| Fork Type                                                              | Swivel Caster With Directional Lock |
| Stainless                                                              | N/A                                 |
| Electrical Conductivity                                                | N/A                                 |
| Anti-Static                                                            | N/A                                 |
| Weight                                                                 | 9.6lbs                              |
| Standard                                                               | ISO22883                            |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

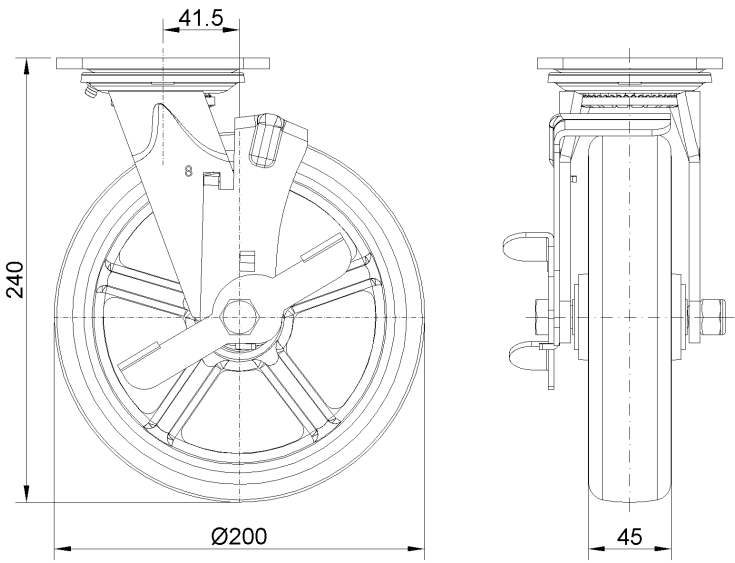

Mounting

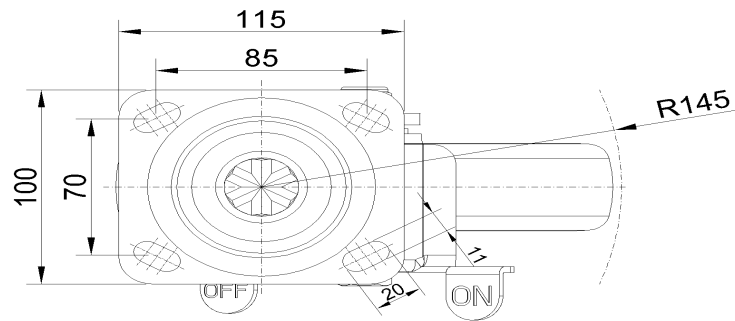

\* For any deviation between metric and imperial spec, please refer to the metric spec.