



1115 Spring-loaded Caster Series (Regular)

PU (Red arc) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11150400331261

Rigid, Spring-loaded Caster with Welded Caster Fork, blue-painted finish.
Mounting Type - Top Plate, 110x75 Bolt Hole Spacing.
Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron red.
Bearing—Ball Bearing.

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

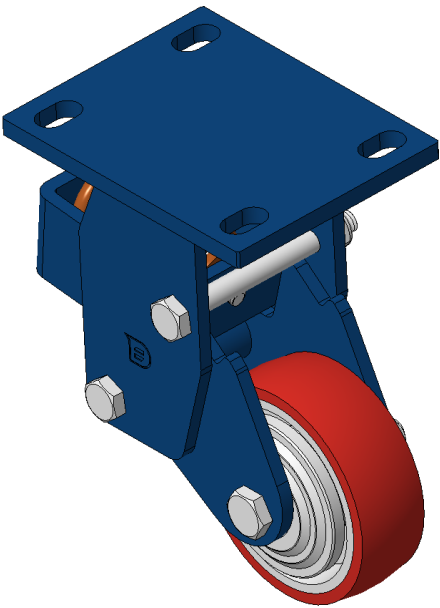

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	100mm
Wheel Width	34mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	110x75mm
Plate Hole	2213mm
Offset	45mm
Swivel Interference	192mm
Overall Height	198mm
Swivel Radius	96mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	200kgs
Load Capacity (Static)	300kgs
Temperature	-20°C to +70°C
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	4.53kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

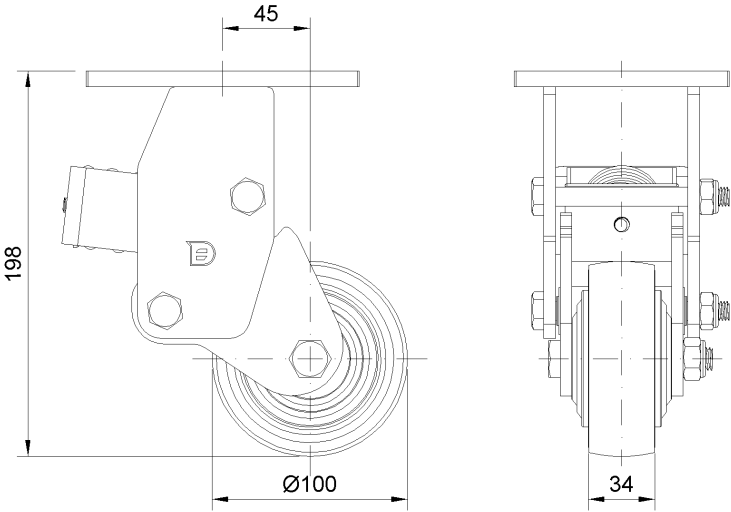

Mounting

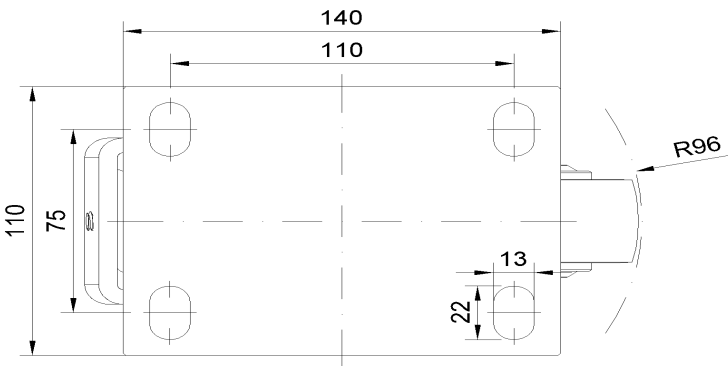

* For any deviation between metric and imperial spec, please refer to the metric spec.