

1115-1 Economy -1 Spring Wheel Series

PU (red round) Wheel Diameter x Wheel Width 125 x 45mm


EAN

KS-11150501332051B

Swivel Spring-loaded Caster with Welded Caster Fork
 Blue painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing
 Cast Iron core with High Quality Polyurethane Wheel Tread
 Cast Iron red, Bearing - Ball Bearings

Wheel tread: Made of high-quality polyurethane
 Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

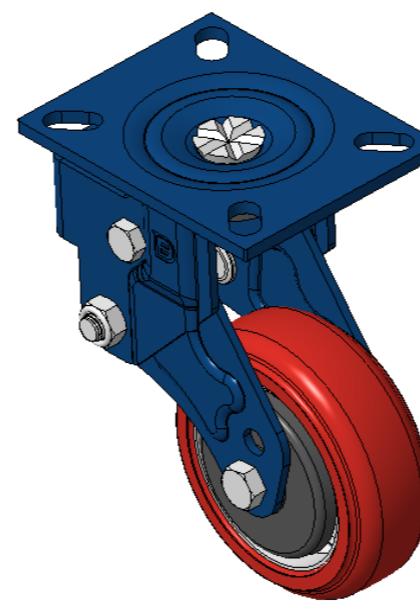

Picture may differ from original product

Technical Data


Imperial Metric

| | |
|-------------------------|---------------------------|
| Wheel Diameter | 5 " |
| Wheel Width | 1-13/16 " |
| Wheel Bearing | Wheels With Ball Bearings |
| Plate Size | 5-9/16 " x 4-3/8 " |
| Bolt Hole Spacing | 4-17/128 |
| Plate Hole | 1 " x 9/16 " |
| Offset | 1-7/16 " |
| Swivel Interference | 8-5/8 " |
| Overall Height | 8-1/4 " |
| Swivel Radius | 4-3/8 " |
| Hardness Of Tread | 92±5° Shore A |
| Load Capacity (Dynamic) | 772lbs |
| Load Capacity (Static) | 1157lbs |
| Temperature | -4°F to +158°F |
| Fork Type | Swivel Caster |
| Stainless | N/A |
| Electrical Conductivity | N/A |
| Anti-Static | N/A |
| Weight | 8.8lbs |
| Standard | ISO22883 |


Advantages at a glance

| | |
|----------------------------|-----------|
| Rolling Resistance | • • • ○ ○ |
| Operating Noise | • • • • ○ |
| Floor Surface Preservation | • • • • ○ |

Dimensions

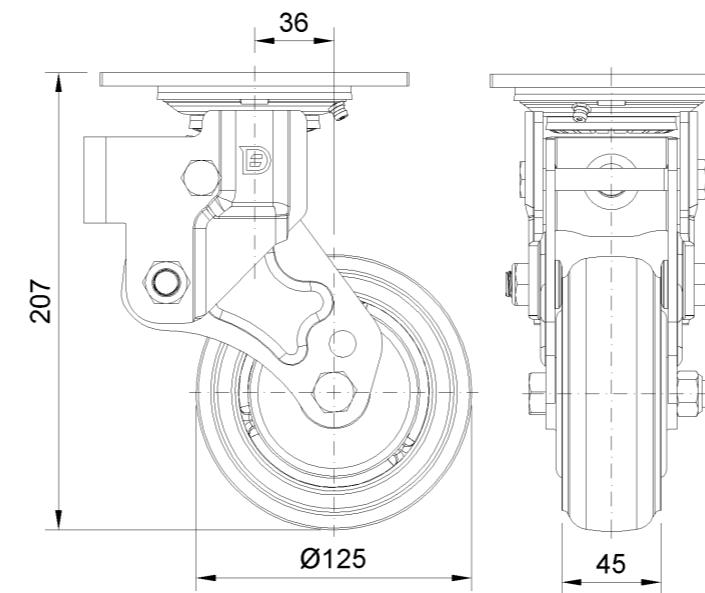

Mounting

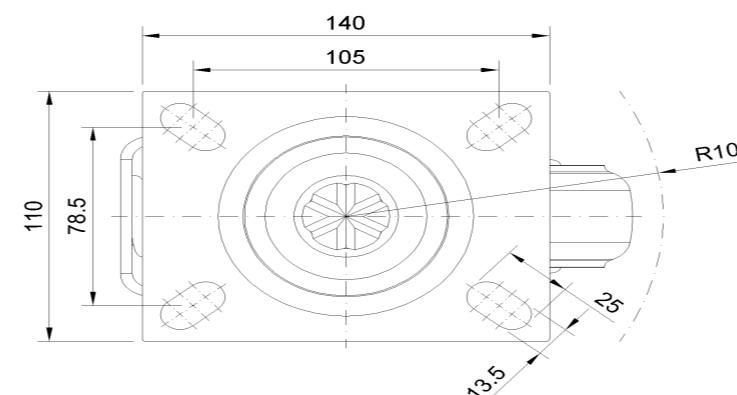

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 DershengInternational www.dersheng.com