

1115 Spring-loaded Caster Series (Regular)

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11150600541291

Rigid Spring-loaded Caster with Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing - Ball Bearings

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

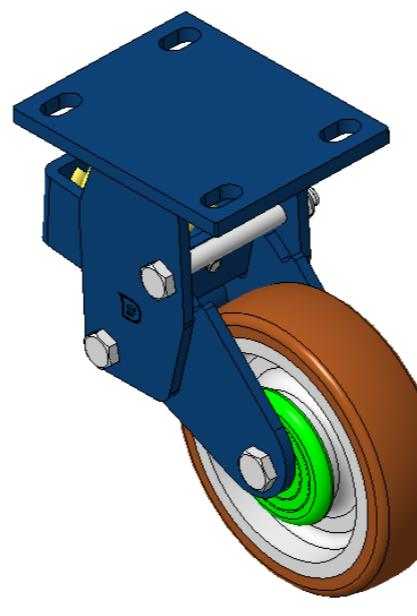

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Overall Height 9 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1102lbs

Load Capacity (Static) 1653lbs

Temperature -4°F to +158°F

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 15.1lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance ● ● ● ○ ○


Operating Noise ● ● ● ● ○

Floor Surface Preservation ● ● ● ● ○

Dimensions

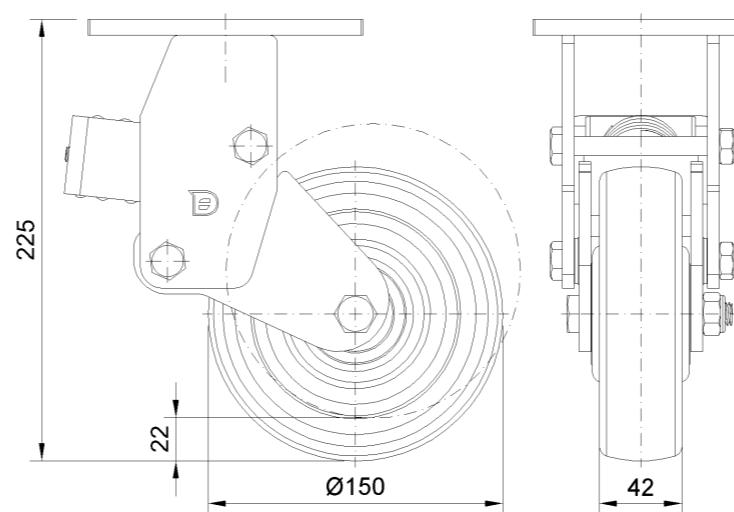

Mounting

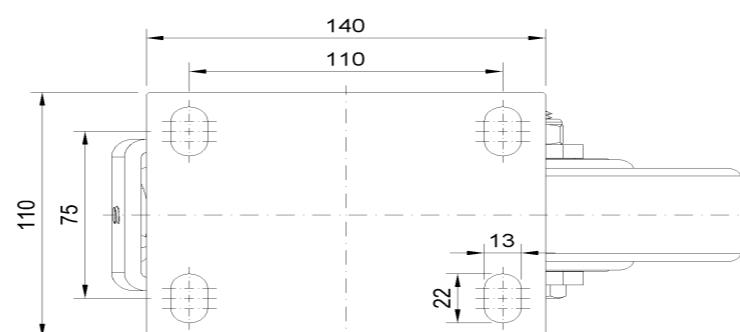

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com