

1115 Spring-loaded Caster Series (Regular)

VQPU (brown round) Wheel Diameter x Wheel Width 150 x 42mm

EAN


KS-11150600544311

Casters with rear brake, Spring-loaded With locking system, Welded Caster Fork
 Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing
 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
 Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

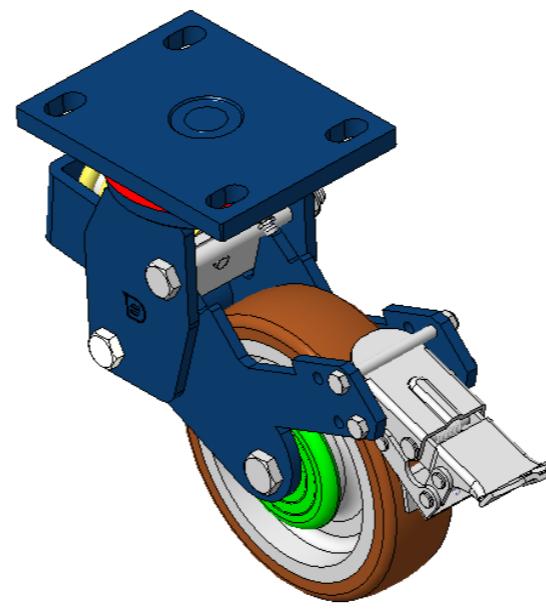

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 6 "

Wheel Width 1-11/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-9/16 " x 4-3/8 "

Bolt Hole Spacing 4-5/16 " x3"

Plate Hole 7/8 " x 9/16 "

Offset 2-5/8 "

Swivel Interference <div style="

Overall Height 9 "

Swivel Radius 9 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 1102lbs

Load Capacity (Static) 1653lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Rear Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 16.3lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • ○ ○


Operating Noise • • • • ○

Floor Surface Preservation • • • • ○

Dimensions

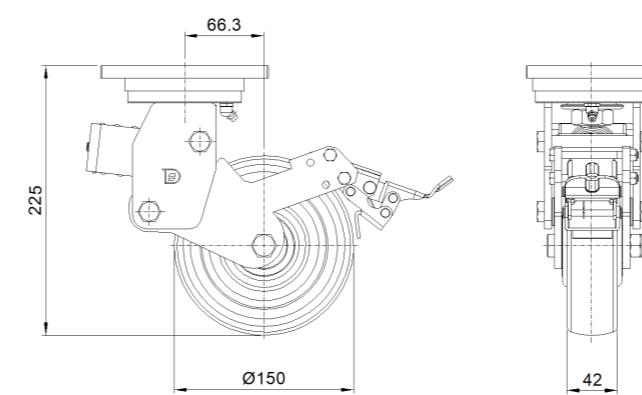

Mounting

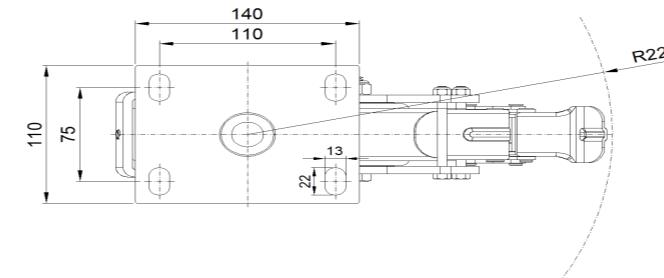

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com