



1115-1 Economy -1 Spring Wheel Series

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11150601042051B

Swivel Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing
Cast Iron core with High-Quality, highly Resilient Rubber Wheel Tread
Cast Iron black, Bearing—Ball Bearings

Wheel surface: Made of high-quality, highly elastic rubber
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

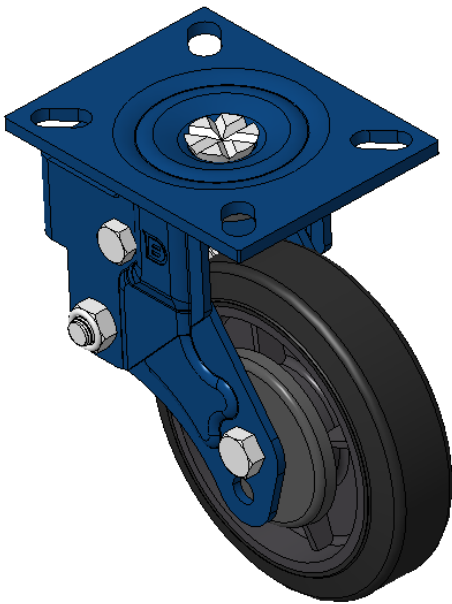

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	6 "
Wheel Width	1-5/8 "
Wheel Bearing	Wheels With Ball Bearings
Plate Size	5-9/16 " x 4-3/8 "
Bolt Hole Spacing	4-1/8 " x 3-1/16 "
Plate Hole	1 " x 9/16 "
Offset	1-5/8 "
Swivel Interference	9-11/16 "
Overall Height	7-15/16 "
Swivel Radius	4-7/8 "
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	661lbs
Load Capacity (Static)	992lbs
Temperature	-4°F to +176°F
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	9.2lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

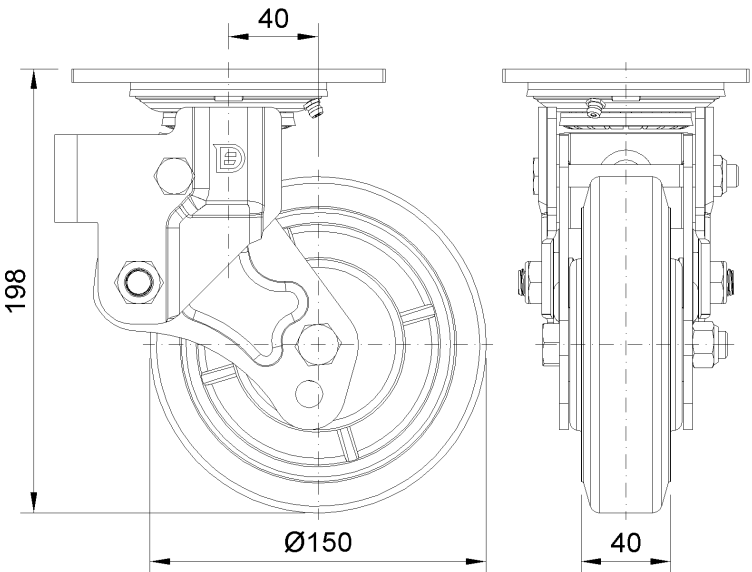

Mounting

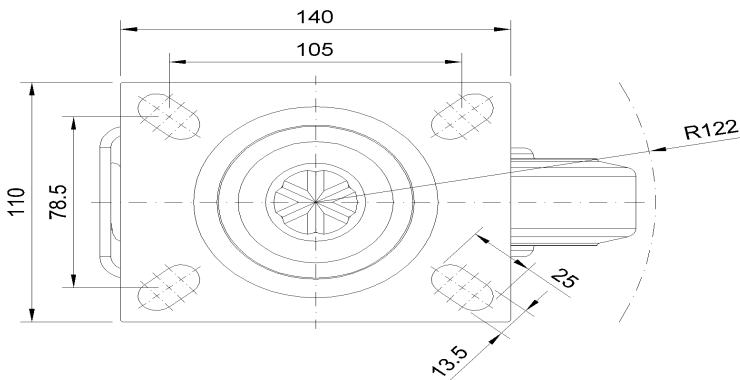

* For any deviation between metric and imperial spec, please refer to the metric spec.