1115-1 Economy -1 Spring Wheel Series

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm

EAN


KS-11150601042151B

Swivel Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing
Cast Iron core with High-Quality, highly Resilient Rubber Wheel Tread
Cast Iron black, Bearing—Ball Bearings

Wheel surface: Made of high-quality and highly elastic rubber

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Fork Type

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-1/8 " x 3-1/16 "

 Plate Hole
 1 " x 9/16 "

 Offset
 1-7/16 "

 Swivel Interference
 9 1/2 "

Swivel Interference 9-1/2 "

Overall Height 8-3/4 "

Swivel Radius 4-13/16 "

Hardness Of Tread 85±5° Shore A

Load Capacity (Dynamic) 661lbs

Load Capacity (Static) 992lbs

Temperature -4°F to +176°F

Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 9.2lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation • • • • •

Dimensions

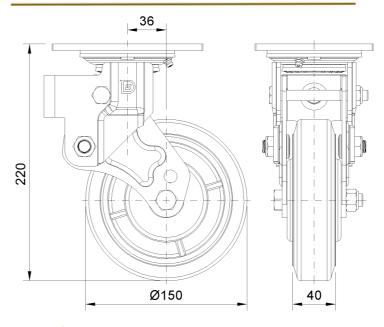

Mounting

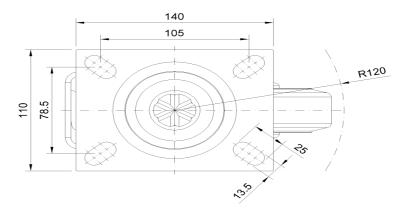

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.