



1115-1 Economy -1 Spring Wheel Series

NBR (milling black) Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11150601044151B

Spring-loaded Casters with front brake and With locking system, Welded Caster Fork. Blue-painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing. Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron black. Bearings—Ball Bearings.

Wheel surface: Made of high-quality, highly elastic rubber
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

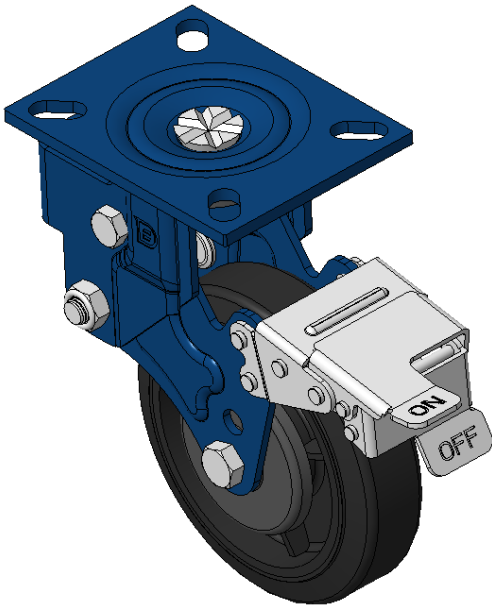

Picture may differ from original product


Technical Data

☒ Imperial ☐ Metric	
Wheel Diameter	150mm
Wheel Width	40mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	140 x 110mm
Bolt Hole Spacing	105 x 78.5mm
Plate Hole	25 x 13.5mm
Offset	36mm
Swivel Interference	342mm
Overall Height	220mm
Swivel Radius	171mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	300kgs
Load Capacity (Static)	450kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster With Front Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	5.27kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

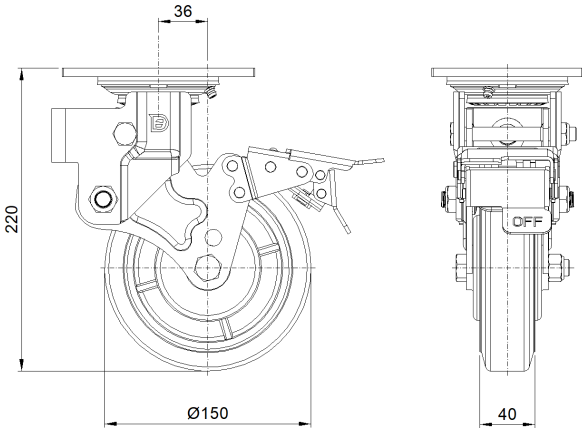

Mounting

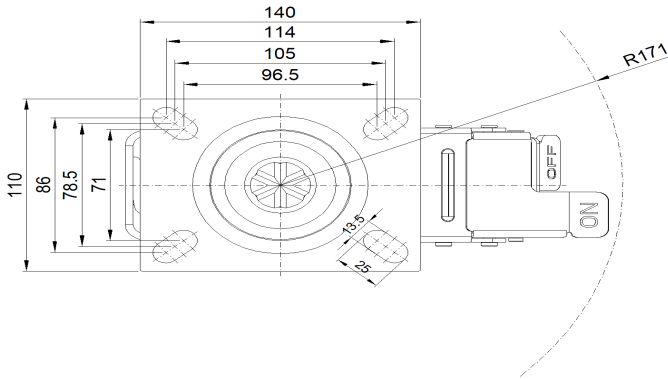

* For any deviation between metric and imperial spec, please refer to the metric spec.