1115-1 Economy -1 Spring Wheel Series

PU (red round) Wheel Diameter x Wheel Width 150 x 45mm


EAN

KS-11150601331051B

Rigid Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing
Cast Iron Wheel Center with High Quality Polyurethane Wheel Tread, Cast Iron red
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm

Bolt Hole Spacing 105 x 78.5mm

Plate Hole 25 x 13.5mm

Overall Height 198mm

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 420kgs

Load Capacity (Static)

Temperature

-20°C to +70°C

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.18kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance •


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions



Mounting

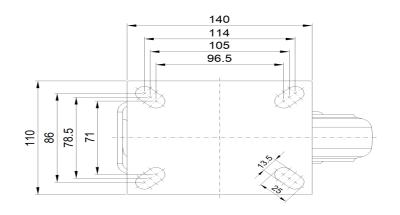

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.