1115-1 Economy -1 Spring Wheel Series

PU (red round) Wheel Diameter x Wheel Width 150 x 45mm


EAN

KS-11150601331131B

Rigid, Spring-loaded Caster with Welded Caster Fork and blue paint finish. Mounting Type - Top Plate, 105x77.5 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread Cast Iron red, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 6 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 5-1/2 " x 4-3/8 "

Bolt Hole Spacing 4-1/8 " x 3-1/16 "

Plate Hole 13/16 " x 9/16 "

Overall Height 8-3/4 "
Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)

Load Capacity (Static)

1389lbs

Temperature

-4°F to +158°F

Fork Type

Rigid Caster

Stainless

N/A

Electrical Conductivity

N/A

Anti-Static

N/A

Weight

9.2lbs

Standard

ISO22883


Advantages at a glance

Rolling Resistance • •


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

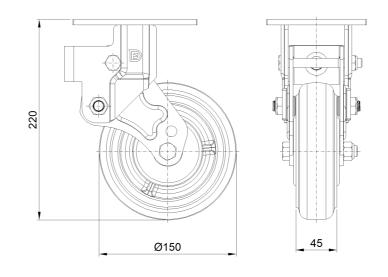

Mounting

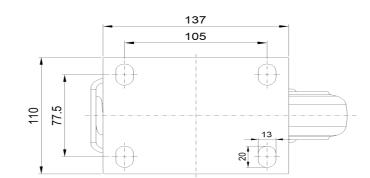

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.