1115-1 Economy -1 Spring Wheel Series

PU (red round) Wheel Diameter x Wheel Width 150 x 45mm


EAN

KS-11150601331151B

Rigid, Spring-loaded Caster with Welded Caster Fork and blue paint finish. Mounting Type - Top Plate, 105x78.5 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread Cast Iron red, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Weight

Standard

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 105 x 78.5mm Plate Hole 25 x 13.5mm Overall Height 220mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 300kgs Load Capacity (Static) 450kgs

Temperature -20°C to +70°C Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A


N/A Anti-Static

> 3.82kgs ISO22883


Advantages at a glance

Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

Dimensions

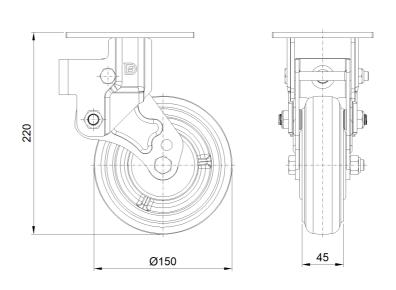

Mounting

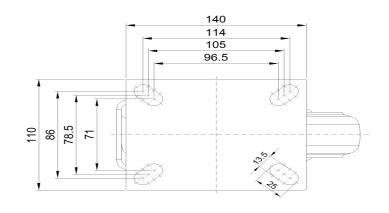

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.