# 1115-1 Economy -1 Spring Wheel Series

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


**EAN** 

KS-11150601534151B

Spring-loaded Casters with front brake and With locking system, Welded Caster Fork. Blue-painted finish, Mounting Type - Top Plate, 105 x 78.5 Bolt Hole Spacing. Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown. Bearings—Ball Bearings.

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

#### Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 42mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 105 x 78.5mm Plate Hole 25 x 13.5mm Offset 36mm 380mm Swivel Interference **Overall Height** 220mm **Swivel Radius** 190mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 500kgs

Load Capacity (Static) 750kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.22kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance


.....

Floor Surface Preservation • • • • •

#### **Dimensions**

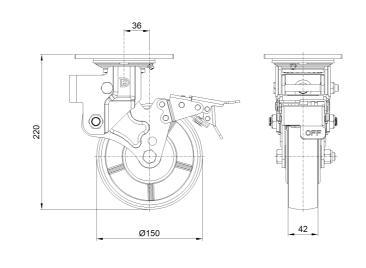

## Mounting

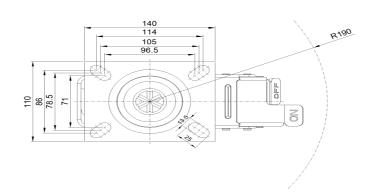

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.