



1115 Spring-loaded Caster Series (Regular)

NBR (milling black) Wheel Diameter x Wheel Width 200 x 44mm


EAN

KS-11151000042561

Spring-loaded Caster with Welded Caster Fork
Blue painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron black Bearings—Ball Bearings

Wheel surface: Made of high-quality, highly elastic rubber
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

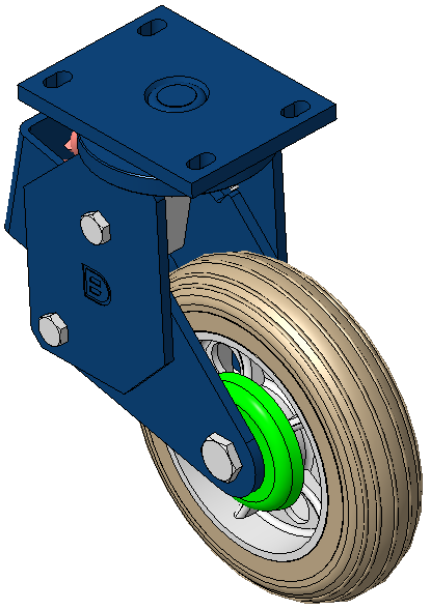

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	250mm
Wheel Width	63mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	170 x 130mm
Bolt Hole Spacing	140x85mm
Plate Hole	22 x 13mm
Offset	83.4mm
Swivel Interference	420mm
Overall Height	353mm
Swivel Radius	210mm
Hardness Of Tread	85±5° Shore A
Load Capacity (Dynamic)	350kgs
Load Capacity (Static)	525kgs
Temperature	-20°C to +80°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	17.29kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

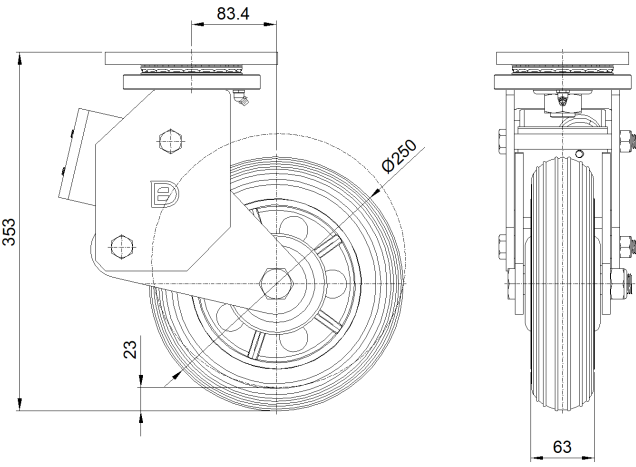

Mounting

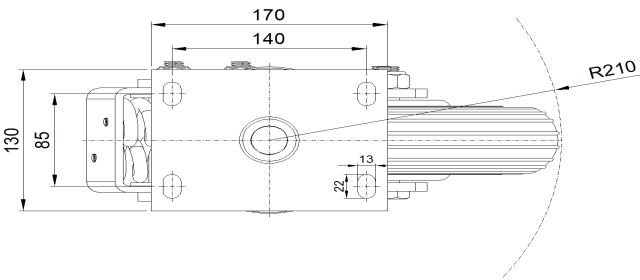

* For any deviation between metric and imperial spec, please refer to the metric spec.