



1115 Spring-loaded Caster Series (Regular)

PU (red flat) Wheel Diameter x Wheel Width 254x 62mm


EAN

KS-11151000334561

Spring-loaded Caster with rear brake, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing Cast Iron core with High Quality Polyurethane Wheel Tread Red-Cast Iron Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

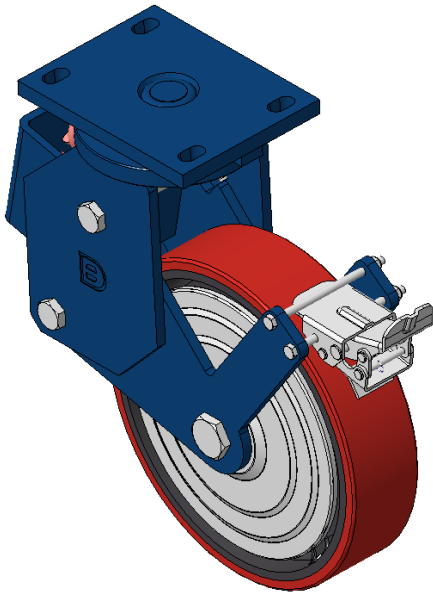

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	254mm
Wheel Width	62mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	170 x 130mm
Bolt Hole Spacing	140x85mm
Plate Hole	22 x 13mm
Offset	83mm
Swivel Interference	510mm
Overall Height	355mm
Swivel Radius	255mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	450kgs
Load Capacity (Static)	675kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster With Rear Brake
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	17.42kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

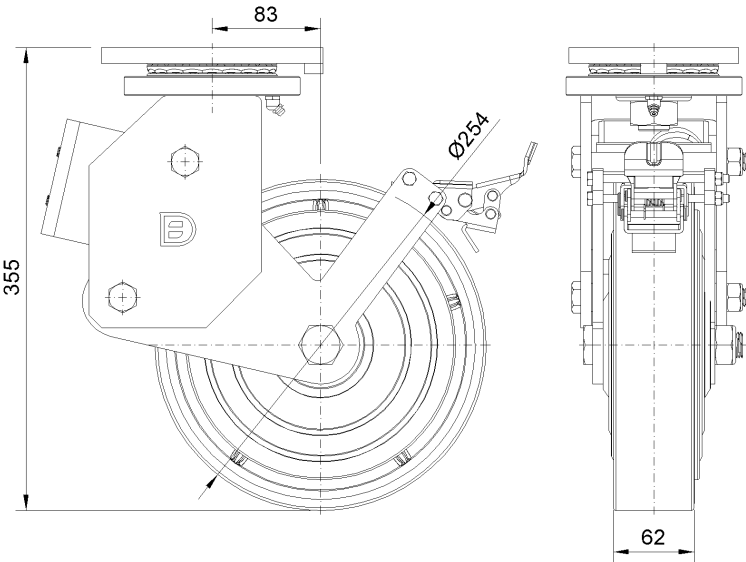

Mounting

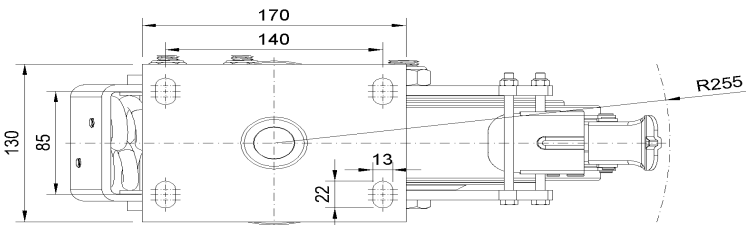

* For any deviation between metric and imperial spec, please refer to the metric spec.