



1115 Spring-loaded Caster Series (Regular)

VQPU (brown round) Wheel Diameter x Wheel Width 250 x 62mm


EAN

KS-11151000542551

Spring-loaded Caster with Welded Caster Fork
Blue-painted finish, Mounting Type - Top Plate, 140x85 Bolt Hole Spacing
Cast Iron core with High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

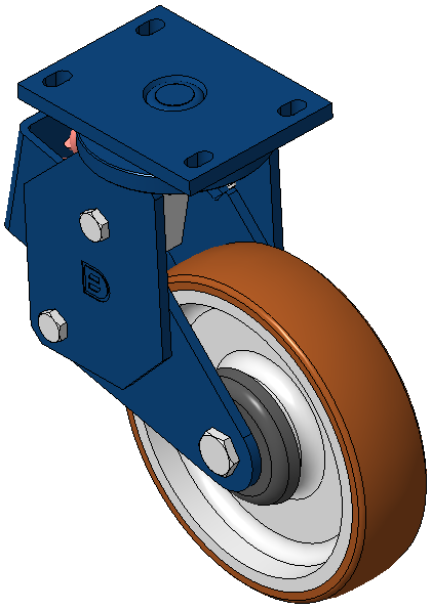

Picture may differ from original product


Technical Data

☒ Metric ☐ Imperial	
Wheel Diameter	250mm
Wheel Width	62mm
Wheel Bearing	Wheels With Ball Bearings
Plate Size	170 x 130mm
Bolt Hole Spacing	140x85mm
Plate Hole	22 x 13mm
Offset	82.9mm
Swivel Interference	428mm
Overall Height	353mm
Swivel Radius	214mm
Hardness Of Tread	92±5° Shore A
Load Capacity (Dynamic)	600kgs
Load Capacity (Static)	900kgs
Temperature	-20°C to +70°C
Fork Type	Swivel Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	17.77kgs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ○ ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ○

Dimensions

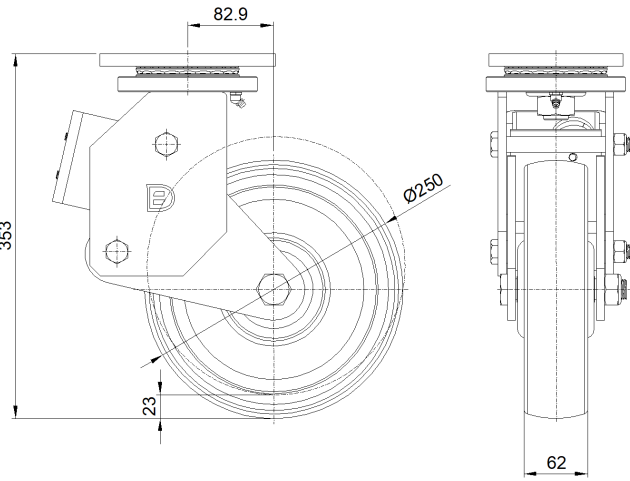

Mounting

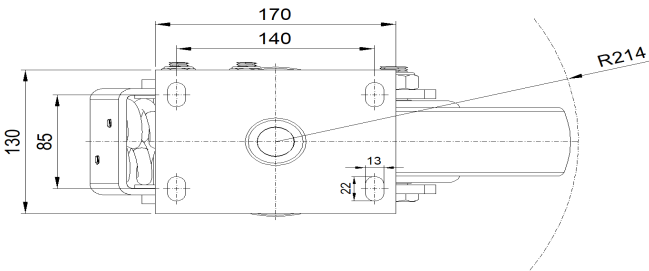

* For any deviation between metric and imperial spec, please refer to the metric spec.