



1123 Shopping Cart Casters Series


Climbing Wheel (Black Gray) Wheel Diameter × Wheel Width 125×22mm

EAN
KS-11230500131473

Rigid Casters, Threaded Stem installation, Threaded Stem connection—M12x35 Rust-proof, Corrosion resistant, Attractive appearance, Economical, and allows for smooth rotation. High-Quality Impact-Resistant Polypropylene Wheel Center, High Quality Polyurethane Wheel Tread. Dark gray, Bearing—Ball Bearings.

Wheel Tread: Hhigh-Quality Polyurethane
Wheel Center: Made of high-quality impact-resistant polypropylene

Drawings are for reference only and may differ from the product

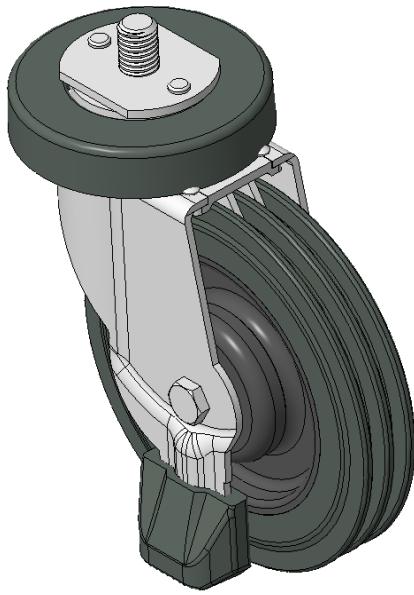

Picture may differ from original product


Technical Data

<input checked="" type="radio"/> Imperial <input type="radio"/> Metric	
Wheel Diameter	5 "
Wheel Width	7/8 "
Wheel Bearing	Wheels With Ball Bearings
Threaded Stem	M12
Threaded Length	1-3/8 "
Offset	1-3/4 "
Overall Height	6 "
Hardness Of Tread	82±5° Shore A
Load Capacity (Dynamic)	110lbs
Load Capacity (Static)	165lbs
Temperature	-4°F to +140°F
Fork Type	Rigid Caster
Stainless	N/A
Electrical Conductivity	N/A
Anti-Static	N/A
Weight	1.3lbs
Standard	ISO22883


Advantages at a glance

Rolling Resistance	● ● ● ● ○
Operating Noise	● ● ● ● ○
Floor Surface Preservation	● ● ● ● ●

Dimensions

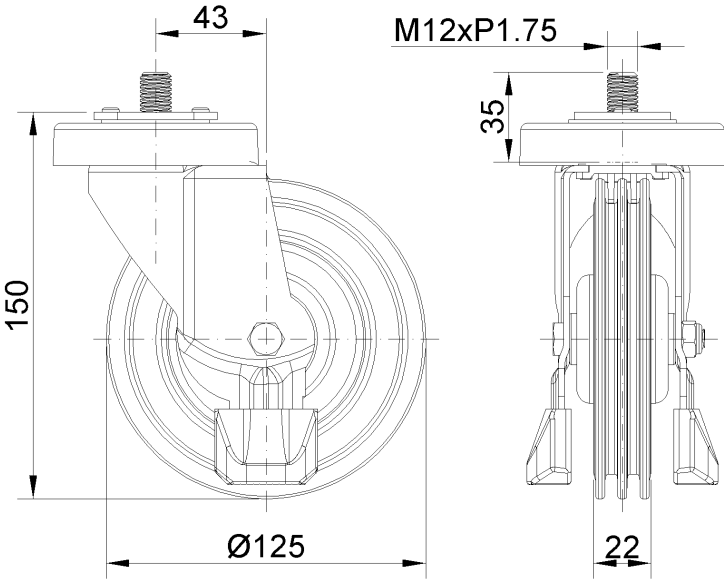

Mounting

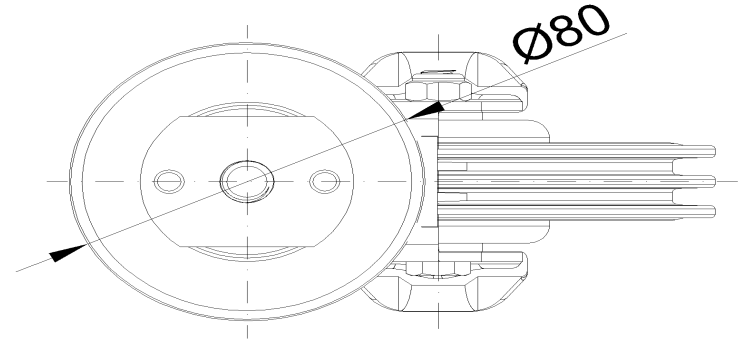

* For any deviation between metric and imperial spec, please refer to the metric spec.