


1135 Med-Glide Series Caster Series

Full-effect wheel (ivory white-gray), wheel diameter × wheel width 125×31mm

EAN

KS-11350500455123

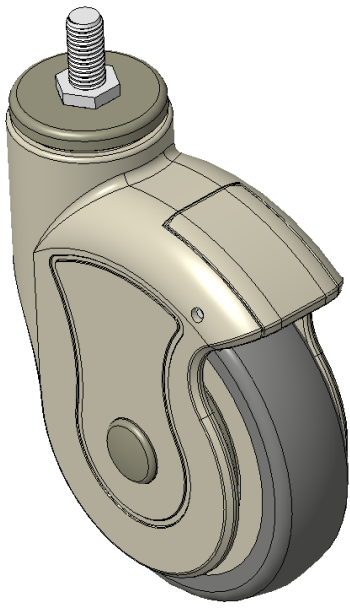

Picture may differ from original product

Drawings are for reference only and may differ from the product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 125mm                     |
| Wheel Width                                                            | 31mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Threaded Stem                                                          | M12                       |
| Threaded Length                                                        | 25mm                      |
| Offset                                                                 | 44mm                      |
| Swivel Interference                                                    | 214mm                     |
| Overall Height                                                         | 174mm                     |
| Swivel Radius                                                          | 107mm                     |
| Hardness Of Tread                                                      | 72±5° Shore A             |
| Load Capacity (Dynamic)                                                | 90kgs                     |
| Load Capacity (Static)                                                 | 135kgs                    |
| Temperature                                                            | -20°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 0.61kgs                   |
| Standard                                                               | ISO22881                  |


Advantages at a glance

|                            |        |
|----------------------------|--------|
| Rolling Resistance         | ●●●●●● |
| Operating Noise            | ●●●●●● |
| Floor Surface Preservation | ●●●●●● |

Dimensions

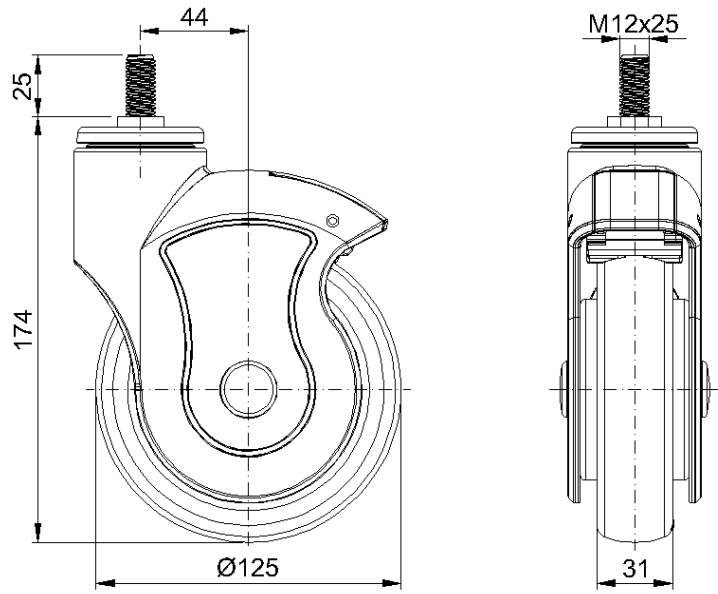

Mounting

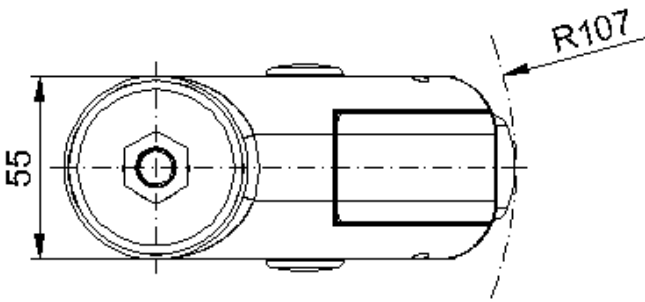

\* For any deviation between metric and imperial spec, please refer to the metric spec.