# 1141 Kingpinless Caster Series

**ERSHENG**Dersheng Casters Keep Rolling

CPD Wheel Diameter × Wheel Width 100 x 32mm

EAN

KS-11410400292013

Swivel Caster, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type, Hole spacing 85x70 Polypropylene Wheel Center, Wheel Tread Natural Color Bearing - Ball Bearing

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 32mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 25.7mm Swivel Interference 154mm Overall Height 141.6mm **Swivel Radius** 77mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 200kgs

Load Capacity (Static) 300kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 1.69kgs

Standard ISO22883

## Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • • •

#### **Dimensions**





## Mounting

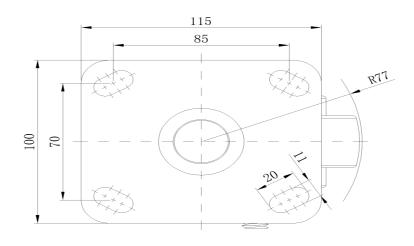

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.