1141 Kingpinless Caster Series

CPD Wheel Diameter × Wheel Width 100 x 32mm

EAN


KS-11410400294013

Casters with Side Brakes and With locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene

Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-5/16 "

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 1-1/16 " 8-1/16 " Swivel Interference 5-5/8 " Overall Height 4-1/16" Swivel Radius Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 441lbs

Load Capacity (Static) 661lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A


Weight 4.2lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance $\bullet \bullet \bullet \bullet \bullet$ Operating Noise $\bullet \bullet \circ \circ$ Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

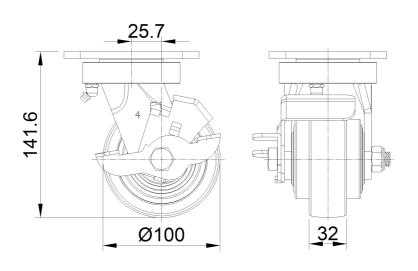

Mounting

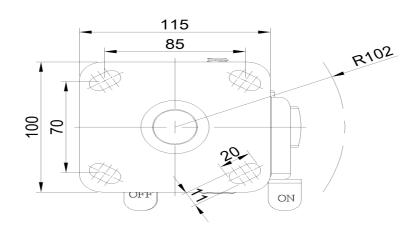

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.