1141 Kingpinless Caster Series

PU (red round) Wheel Diameter x Wheel Width 100 x 45mm


EAN

KS-11410400331213

Rigid Caster, Welded Caster Fork
Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Standard

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-13/16 "

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole 5-5/8 " Overall Height Hardness Of Tread 93±5° Shore A Load Capacity (Dynamic) 1058lbs Load Capacity (Static) 893lbs Temperature -4°F to +158°F Fork Type Rigid Caster Stainless N/A **Electrical Conductivity** N/A N/A Anti-Static Weight 5.0lbs

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

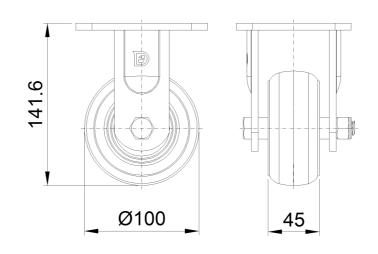

Mounting

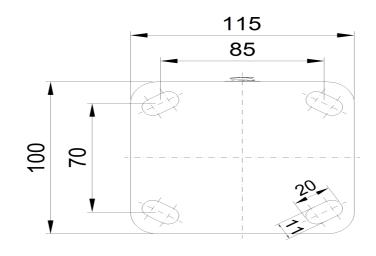

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883