



1141 Kingpinless Caster Series

PU (red flat) Wheel Diameter x Wheel Width 100 x 34mm


EAN

KS-11410400334113

Castors with Front Brake locking system, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type, Hole spacing 85x70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red Bearing - Ball Bearing

Wheel tread: High quality polyurethane wheel tread  
Wheel Center: iron core/cast iron

Drawings are for reference only and may differ from the product

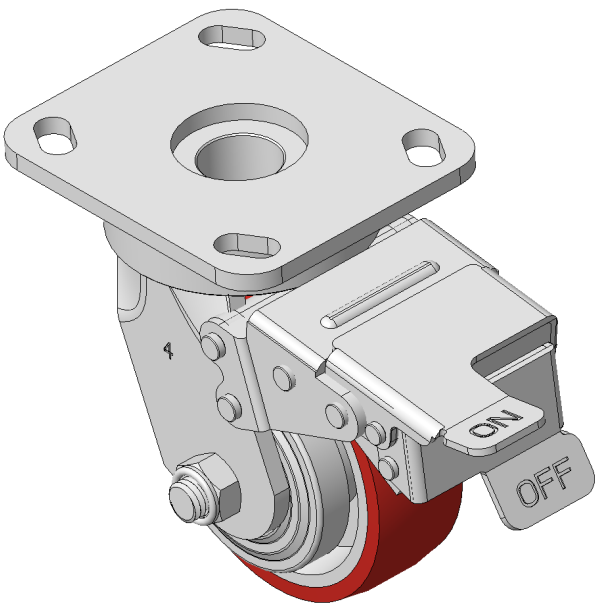

Picture may differ from original product


Technical Data

|                                                                        |                                |
|------------------------------------------------------------------------|--------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                |
| Wheel Diameter                                                         | 4 "                            |
| Wheel Width                                                            | 1-3/8 "                        |
| Wheel Bearing                                                          | Wheels With Ball Bearings      |
| Plate Size                                                             | 4-9/16 " x 4 "                 |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "              |
| Plate Hole                                                             | 13/16 " x 3/8 "                |
| Offset                                                                 | 1-1/16 "                       |
| Swivel Interference                                                    | 11-1/2 "                       |
| Overall Height                                                         | 5-5/8 "                        |
| Swivel Radius                                                          | 5-3/4 "                        |
| Hardness Of Tread                                                      | 93±5° Shore A                  |
| Load Capacity (Dynamic)                                                | 705lbs                         |
| Load Capacity (Static)                                                 | 1058lbs                        |
| Temperature                                                            | -4°F to +158°F                 |
| Fork Type                                                              | Swivel Caster With Front Brake |
| Stainless                                                              | N/A                            |
| Electrical Conductivity                                                | N/A                            |
| Anti-Static                                                            | N/A                            |
| Weight                                                                 | 5.1lbs                         |
| Standard                                                               | ISO22883                       |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

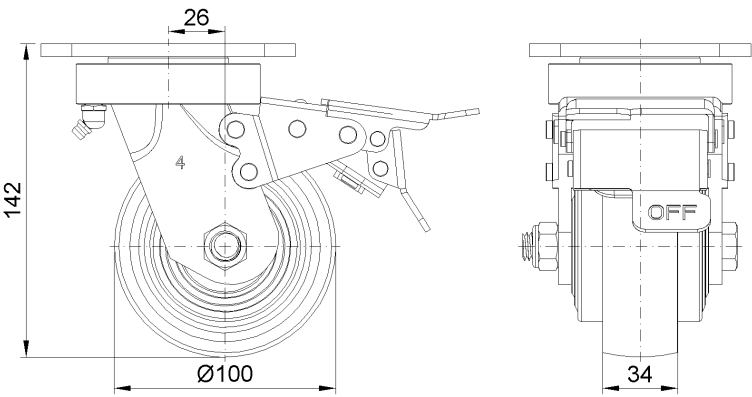

Mounting

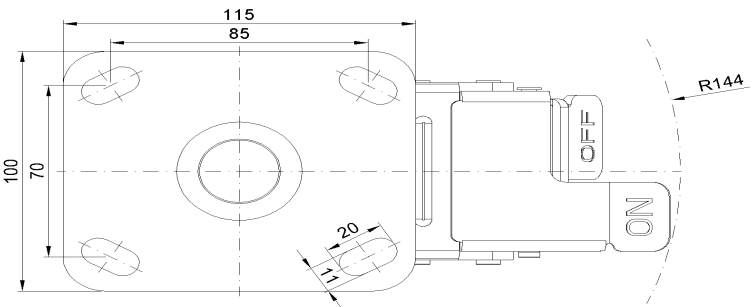

\* For any deviation between metric and imperial spec, please refer to the metric spec.