1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

WHDR (pearl light gray) Wheel Diameter x Wheel Width 100 x 50mm

EAN

KS-11410400502723


Swivel castor, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type, Hole spacing 85x70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, pearl light gray Bearing - Ball Bearing

95±5° Shore A

Swivel Caster

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Technical Data

Wheel Width

● Imperial ○ Metric

Hardness Of Tread

Fork Type

Wheel Diameter 4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 5-5/8 "

Load Capacity (Dynamic) 595lbs

Load Capacity (Static) 893lbs

Temperature -4°F to +140°F

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.1lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • • •

Dimensions





Mounting

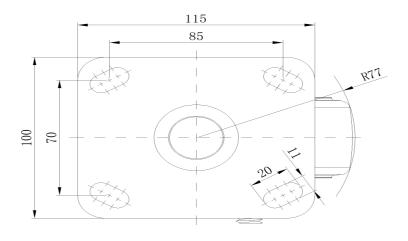

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.