1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

WHDR (pearl light gray) Wheel Diameter x Wheel Width 100 x 50mm


EAN

KS-11410400504723

Casters with Side Brakes and With locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, pearlescent light gray Bearings—Ball Bearings

Wheel Tread: Hhigh-Quality Polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Width

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 5-5/8 "

Hardness Of Tread 95±5° Shore A

Load Capacity (Dynamic) 595lbs

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

-4°F to +140°F

Fork Type

Swivel Caster

Stainless

N/A

Electrical Conductivity

N/A

Electrical Conductivity

Anti-Static

N/A

Weight

4.5lbs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

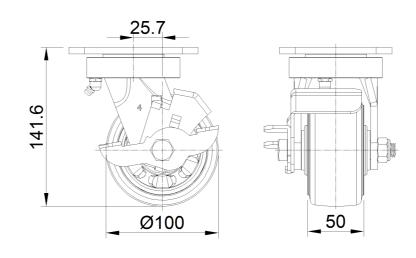

Mounting

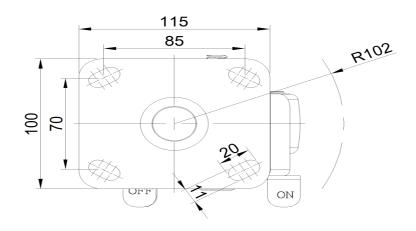

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.