# 1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11410400532133

Swivel Caster, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type, Hole spacing 85x70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 110 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 25.7mm Swivel Interference 154mm Overall Height 141.6mm **Swivel Radius** 77mm Hardness Of Tread

92±5° Shore A

Load Capacity (Dynamic) 335kgs Load Capacity (Static) 502kgs


Temperature -20°C to +70°C Fork Type **Swivel Caster** 


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 2.26kgs Standard ISO22883

## Advantages at a glance


Rolling Resistance **Operating Noise** Floor Surface Preservation • • • • •

#### **Dimensions**





## Mounting

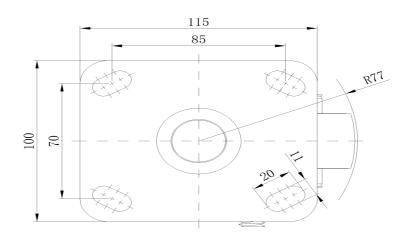

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.