1141 Kingpinless Caster Series

QPU (brown round) Wheel Diameter × Wheel Width 100 x 34mm


EAN

KS-11410400534013

Casters with Side Brakes and With locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-3/8 "

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 1-1/16 " 8-1/16 " Swivel Interference 5-5/8 " Overall Height 4-1/16" **Swivel Radius** Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 739lbs

Load Capacity (Static) 1108lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.2lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance


Operating Noise

Floor Surface Preservation


• • • • •

Dimensions





Mounting

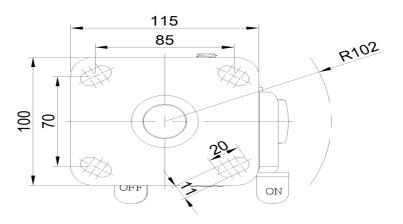

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.