1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

PU (red round) Wheel Diameter x Wheel Width 125 x 45mm


EAN

KS-11410500331213

Rigid castor, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 90x60 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red Bearing-Ball Bearing

Wheel tread: Made of high quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

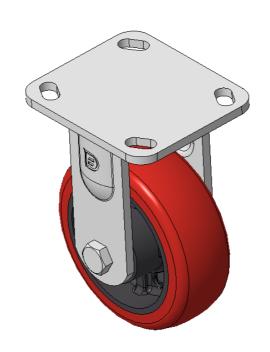

Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 45mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 167mm

Hardness Of Tread 93±5° Shore A

Hardness Of Tread 93±5 Shore

Load Capacity (Dynamic) 230kgs

Load Capacity (Static) 345kgs

Temperature -20°C to +70°C

Fork Type Rigid Caster

Stainless N/A

StainlessN/AElectrical ConductivityN/AAnti-StaticN/AWeight2.41kgsStandardISO22883

Advantages at a glance

Rolling Resistance


• • • • •


Operating Noise

• • • 0


Floor Surface Preservation • • • • •

Dimensions





Mounting

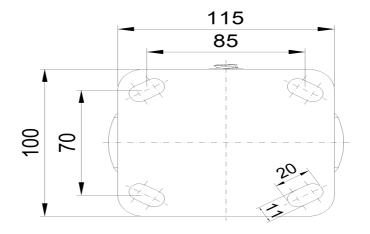

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.