



1141 Kingpinless Caster Series

PU (red round) Wheel Diameter x Wheel Width 125 x 45mm


EAN

KS-11410500333213

Casters with directional brake and With locking system, Welded Caster Fork  
Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red  
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

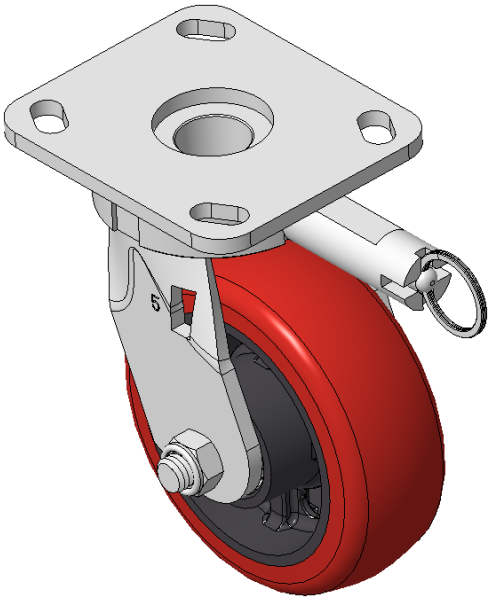

Picture may differ from original product


Technical Data

|                                                                        |                                     |
|------------------------------------------------------------------------|-------------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                                     |
| Wheel Diameter                                                         | 5 "                                 |
| Wheel Width                                                            | 1-13/16 "                           |
| Wheel Bearing                                                          | Wheels With Ball Bearings           |
| Plate Size                                                             | 4-9/16 " x 4 "                      |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "                   |
| Plate Hole                                                             | 13/16 " x 3/8 "                     |
| Offset                                                                 | 1-3/16 "                            |
| Swivel Interference                                                    | 11-7/16 "                           |
| Overall Height                                                         | 6-5/8 "                             |
| Swivel Radius                                                          | 5-11/16 "                           |
| Hardness Of Tread                                                      | 93±5° Shore A                       |
| Load Capacity (Dynamic)                                                | 507lbs                              |
| Load Capacity (Static)                                                 | 761lbs                              |
| Temperature                                                            | -4°F to +158°F                      |
| Fork Type                                                              | Swivel Caster With Directional Lock |
| Stainless                                                              | N/A                                 |
| Electrical Conductivity                                                | N/A                                 |
| Anti-Static                                                            | N/A                                 |
| Weight                                                                 | 6.9lbs                              |
| Standard                                                               | ISO22883                            |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

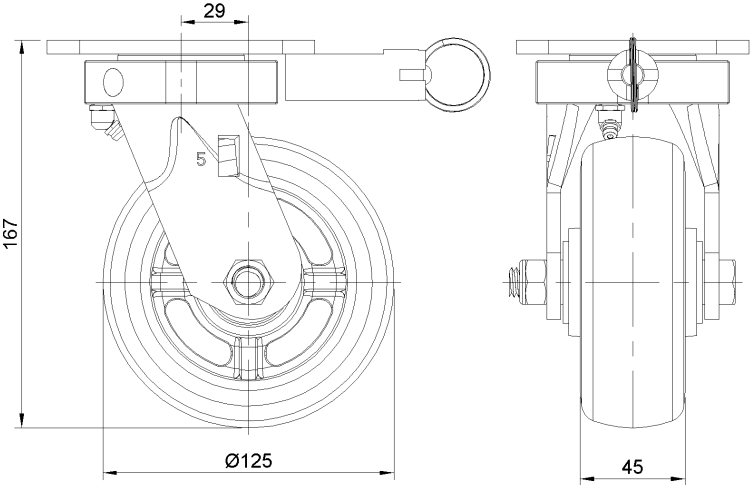

Mounting

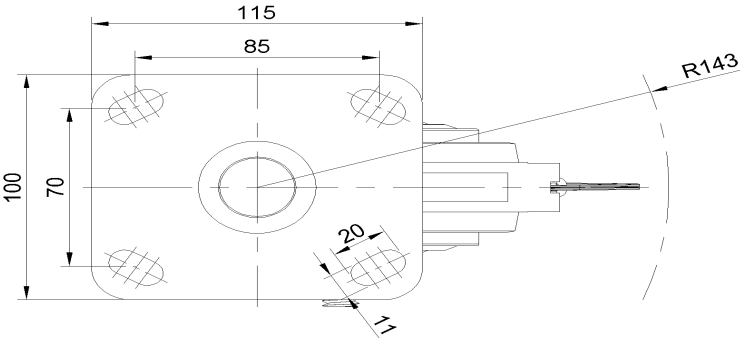

\* For any deviation between metric and imperial spec, please refer to the metric spec.