



1141 Kingpinless Caster Series

QPU (Brown round) Wheel Diameter × Wheel Width 125 x 40mm


EAN

KS-11410500534023

Casters with Side Brakes and With locking system, Welded Caster Fork  
Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown  
Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

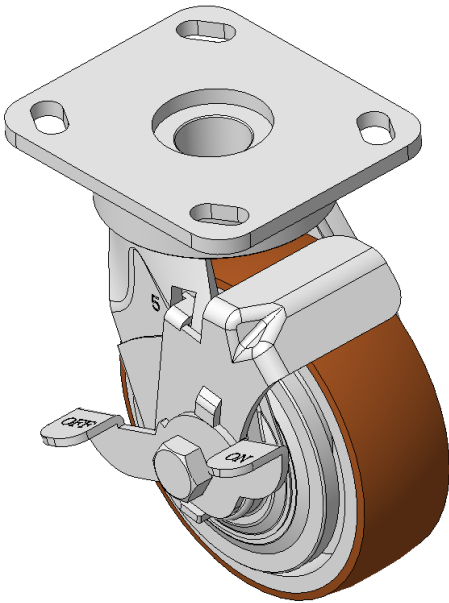

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Imperial <input type="radio"/> Metric |                               |
| Wheel Diameter                                                         | 4 "                           |
| Wheel Width                                                            | 1-5/8 "                       |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 4-9/16 " x 4 "                |
| Bolt Hole Spacing                                                      | 3-3/8 " x 2-3/4 "             |
| Plate Hole                                                             | 13/16 " x 3/8 "               |
| Offset                                                                 | 1-3/16 "                      |
| Swivel Interference                                                    | 8-1/16 "                      |
| Overall Height                                                         | 6-5/8 "                       |
| Swivel Radius                                                          | 4-1/16 "                      |
| Hardness Of Tread                                                      | 92±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 992lbs                        |
| Load Capacity (Static)                                                 | 1488lbs                       |
| Temperature                                                            | -4°F to +158°F                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 7.5lbs                        |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ● ● |
| Floor Surface Preservation | ● ● ● ● ● |

Dimensions

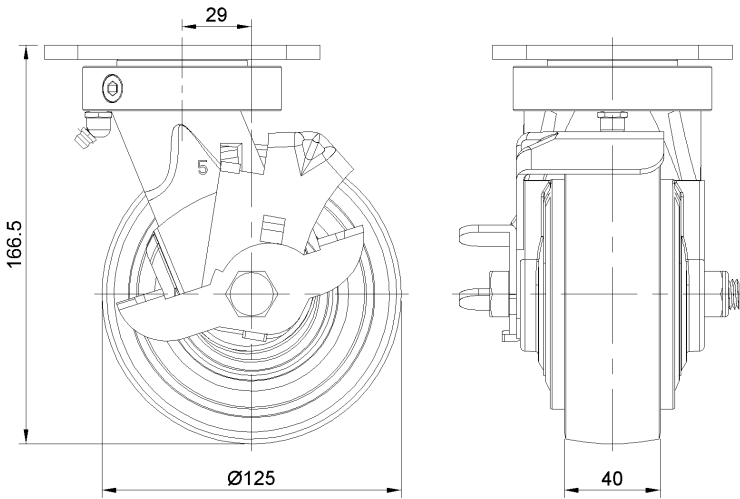

Mounting

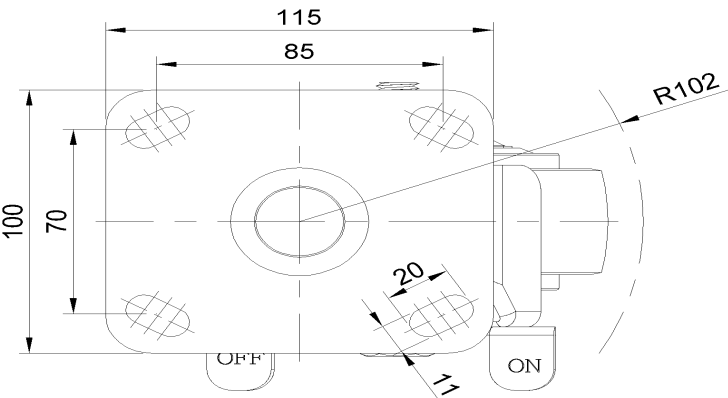

\* For any deviation between metric and imperial spec, please refer to the metric spec.