# 1141 Kingpinless Caster Series

MRC (Transparent) Wheel Diameter × Wheel Width 150 x 40mm


EAN

KS-11410600071013

Rigid Caster, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Reinforced Polypropylene Wheel Center, natural color Wheel Tread Bearing—Ball Bearing

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

### **Technical Data**

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Overall Height 7-1/2 "

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic)

Load Capacity (Static)

Temperature

-4°F to +176°F

Fork Type

Rigid Caster

Fork Type Rigid Cast
Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.4lbs

Standard ISO22883

### Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


-1 0 ( D "

Floor Surface Preservation • • • • • •

#### **Dimensions**



## Mounting

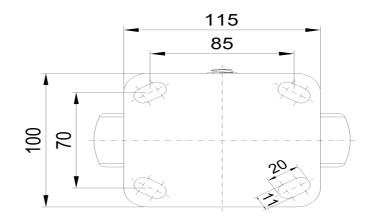

40

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.