## 1141 Kingpinless Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11410600291013

Rigid Caster, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Reinforced Polypropylene Wheel Center, natural color Wheel Tread Bearing—Ball Bearing

Wheel tread: Thermoplastic (PA6)
Wheel Center: Thermoplastic (PA6)

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

Standard

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 189mm

Hardness Of Tread 75±5° Shore D

Load Capacity (Dynamic) 400kgs

Load Capacity (Static) 600kgs

Temperature -20°C to +80°C

Fork Type Rigid Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.03kgs


## Advantages at a glance


Rolling Resistance

Operating Noise •


Floor Surface Preservation • • ○ ○ ○

## **Dimensions**





Mounting

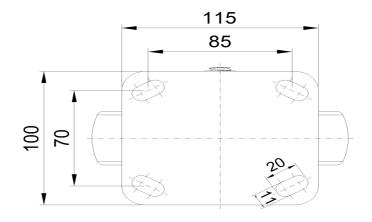

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.

ISO22883