

1141 Kingpinless Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11410600293013

Casters with directional brake and With locking system, Welded Caster Fork
 Zinc-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing
 Polypropylene Wheel Center, natural Wheel Tread
 Bearings—Ball Bearings

Wheel surface: PP polypropylene
 Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

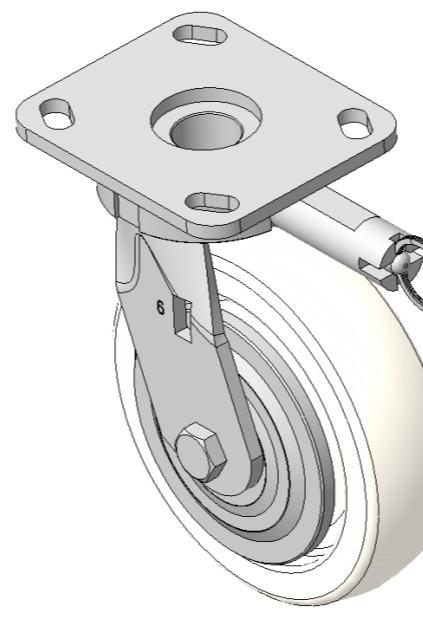

Picture may differ from original product

Technical Data

 Imperial Metric

Wheel Diameter 6 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

Plate Size 4-9/16 " x 4 "

Bolt Hole Spacing 3-3/8 " x 2-3/4 "

Plate Hole 13/16 " x 3/8 "

Offset 1-5/16 "

Swivel Interference 11-7/16 "

Overall Height 7-1/2 "

Swivel Radius 5-11/16 "

Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 772lbs

Load Capacity (Static) 1157lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Side Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 6.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance • • • •


Operating Noise • • • o o

Floor Surface Preservation • • • o o

Dimensions

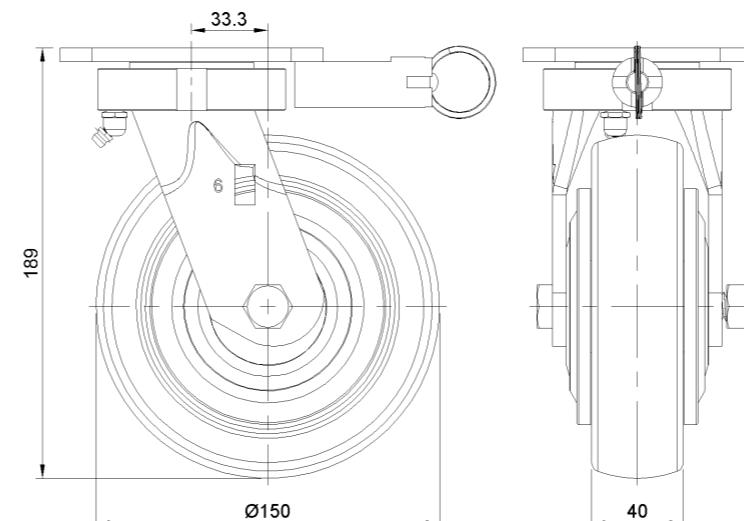

Mounting

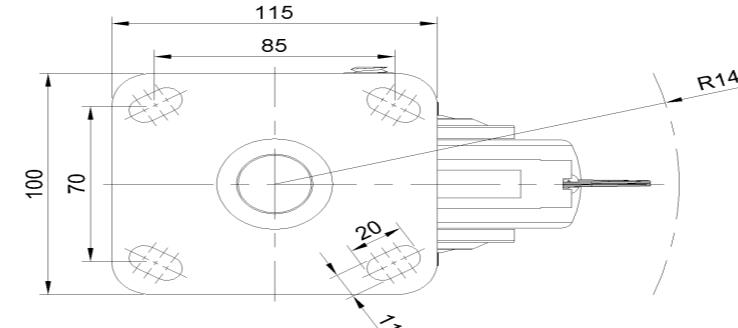

* For any deviation between metric and imperial spec, please refer to the metric spec.

© Copyright 2025 Dersheng International www.dersheng.com