1141 Kingpinless Caster Series

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11410600294013

Casters with Side Brakes and With locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

Technical Data

Fork Type

Standard

● Imperial ○ Metric

6 " Wheel Diameter

1-5/8 " Wheel Width

Wheel Bearing Wheels With Ball Bearings

4-9/16" x 4" Plate Size 3-3/8 " x 2-3/4 " **Bolt Hole Spacing** 13/16 " x 3/8 " Plate Hole Offset 1-5/16 " 9-13/16" Swivel Interference 7-1/2 " Overall Height 4-15/16" Swivel Radius Hardness Of Tread 72±5° Shore D

772lbs Load Capacity (Dynamic) Load Capacity (Static) 1157lbs

Temperature 4°F to +140°F

Swivel Caster With Side Brake

ISO22883


Stainless N/A **Electrical Conductivity** N/A Anti-Static N/A Weight 6.2lbs

Advantages at a glance


Rolling Resistance Operating Noise

Floor Surface Preservation • • • • • •

Dimensions

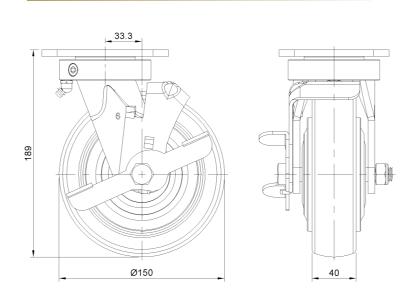

Mounting

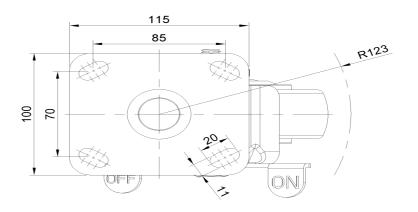

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.