



1141 Kingpinless Caster Series

PU (red round) Wheel Diameter x Wheel Width 150x 42mm


EAN

KS-11410600334043

Casters with Side Brakes and With locking system, Welded Caster Fork  
Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing  
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron red  
Bearings—Ball Bearings

Wheel tread: Made of high-quality polyurethane  
Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product

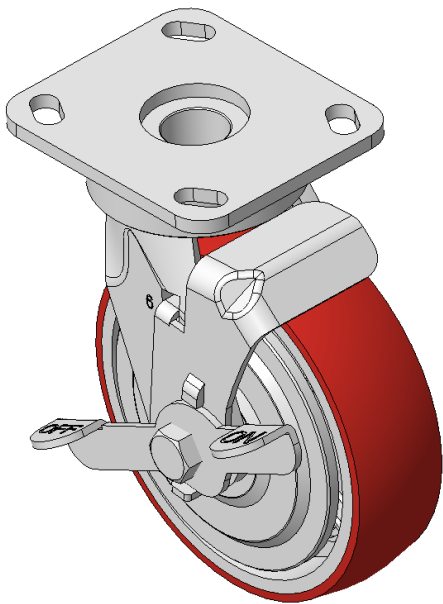

Picture may differ from original product


Technical Data

|                                                                        |                               |
|------------------------------------------------------------------------|-------------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                               |
| Wheel Diameter                                                         | 150mm                         |
| Wheel Width                                                            | 42mm                          |
| Wheel Bearing                                                          | Wheels With Ball Bearings     |
| Plate Size                                                             | 115 x 100mm                   |
| Bolt Hole Spacing                                                      | 85 x 70mm                     |
| Plate Hole                                                             | 20 x 11mm                     |
| Offset                                                                 | 33.3mm                        |
| Swivel Interference                                                    | 246mm                         |
| Overall Height                                                         | 189mm                         |
| Swivel Radius                                                          | 123mm                         |
| Hardness Of Tread                                                      | 93±5° Shore A                 |
| Load Capacity (Dynamic)                                                | 410kgs                        |
| Load Capacity (Static)                                                 | 615kgs                        |
| Temperature                                                            | -20°C to +70°C                |
| Fork Type                                                              | Swivel Caster With Side Brake |
| Stainless                                                              | N/A                           |
| Electrical Conductivity                                                | N/A                           |
| Anti-Static                                                            | N/A                           |
| Weight                                                                 | 3.51kgs                       |
| Standard                                                               | ISO22883                      |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ○ ○ |
| Operating Noise            | ● ● ● ● ○ |
| Floor Surface Preservation | ● ● ● ● ○ |

Dimensions

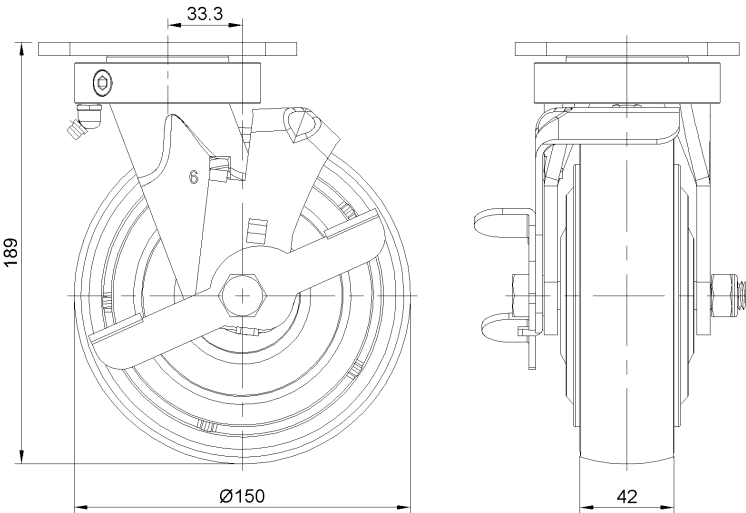

Mounting

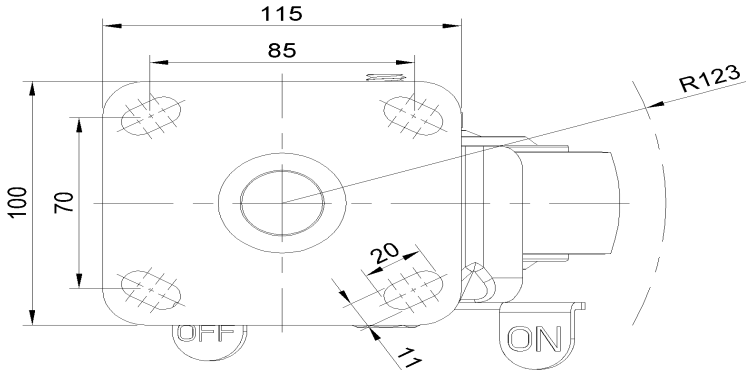

\* For any deviation between metric and imperial spec, please refer to the metric spec.