## 1141 Kingpinless Caster Series

QPU (Brown round) Wheel Diameter × Wheel Width 150 x 42mm


EAN

KS-11410600534123

Casters with Side Brakes and With locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearings—Ball Bearings with special Anti-thread wheel cover

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Dersheng Casters Keep Rolling

Picture may differ from original product

## Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm Wheel Width 42mm

Wheels With Ball Bearings Wheel Bearing

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 33.3mm Swivel Interference 324mm Overall Height 189mm **Swivel Radius** 162mm 92±5° Shore A Hardness Of Tread

Load Capacity (Dynamic) 550kgs Load Capacity (Static) 825kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Side Brake

N/A Stainless N/A **Electrical Conductivity** Anti-Static N/A Weight 4.04kgs Standard ISO22883


## Advantages at a glance

Rolling Resistance


**Operating Noise** 

Floor Surface Preservation • • • • •

## **Dimensions**

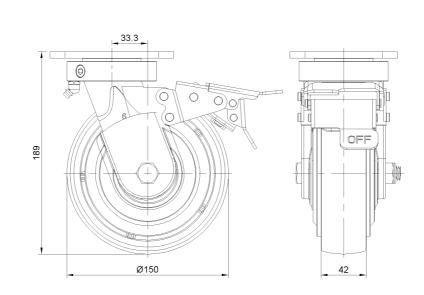

Mounting

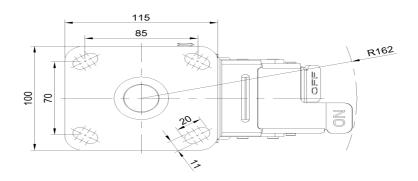

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.