



1141 Kingpinless Caster Series

CPD Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11410800292031

Swivel Caster, Welded Caster Fork Extended control lever surface, Top Plate Mounting Type, Hole spacing 85x70 Polypropylene Wheel Center and Wheel Tread, Natural Color Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel Tread: PP polypropylene  
Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product

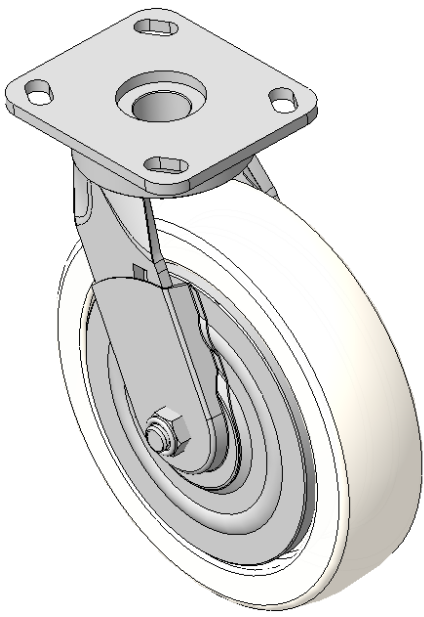

Picture may differ from original product


Technical Data

|                                                                        |                           |
|------------------------------------------------------------------------|---------------------------|
| <input checked="" type="radio"/> Metric <input type="radio"/> Imperial |                           |
| Wheel Diameter                                                         | 200mm                     |
| Wheel Width                                                            | 50mm                      |
| Wheel Bearing                                                          | Wheels With Ball Bearings |
| Plate Size                                                             | 115 x 100mm               |
| Bolt Hole Spacing                                                      | 85 x 70mm                 |
| Plate Hole                                                             | 20 x 11mm                 |
| Offset                                                                 | 42.8mm                    |
| Swivel Interference                                                    | 290mm                     |
| Overall Height                                                         | 240mm                     |
| Swivel Radius                                                          | 145mm                     |
| Hardness Of Tread                                                      | 72±5° Shore D             |
| Load Capacity (Dynamic)                                                | 400kgs                    |
| Load Capacity (Static)                                                 | 600kgs                    |
| Temperature                                                            | -12°C to +60°C            |
| Fork Type                                                              | Swivel Caster             |
| Stainless                                                              | N/A                       |
| Electrical Conductivity                                                | N/A                       |
| Anti-Static                                                            | N/A                       |
| Weight                                                                 | 3.68kgs                   |
| Standard                                                               | ISO22883                  |


Advantages at a glance

|                            |           |
|----------------------------|-----------|
| Rolling Resistance         | ● ● ● ● ● |
| Operating Noise            | ● ● ● ○ ○ |
| Floor Surface Preservation | ● ● ● ○ ○ |

Dimensions

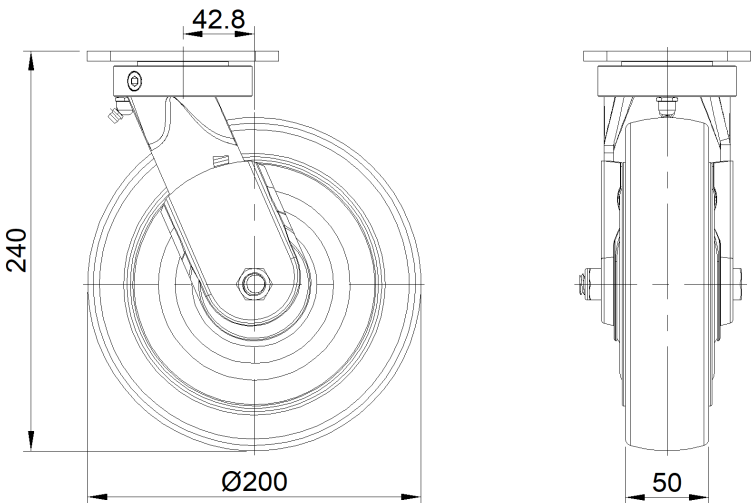

Mounting

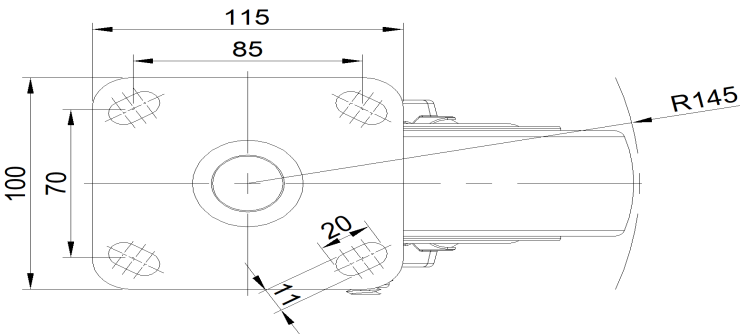

\* For any deviation between metric and imperial spec, please refer to the metric spec.