# 1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN


KS-11410800531123

Rigid castor, Welded Caster Fork Extended control lever surface, Mounting Type - Top Plate, Hole spacing 85x70 Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown Bearing - Ball Bearing, with special Anti-thread wheel cover

Wheel tread: Made of high quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

Wheel Width

● Metric ○ Imperial

Wheel Diameter 200mm

Wheel Bearing Wheels With Ball Bearings

50mm

Plate Size 100 x 115mm

Bolt Hole Spacing 85 x 70mm

Plate Hole 20 x 11mm

Overall Height 240mm

Hardness Of Tread 92+5° Shore A

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)670kgsLoad Capacity (Static)1005kgsTemperature-20°C to +70°CFork TypeRigid CasterStainlessN/AElectrical ConductivityN/A

Anti-Static N/A
Weight 4.54kgs
Standard ISO22883

## Advantages at a glance

Rolling Resistance


• • • • •


**Operating Noise** 

• • • •


Floor Surface Preservation • • • • •

#### **Dimensions**





## Mounting

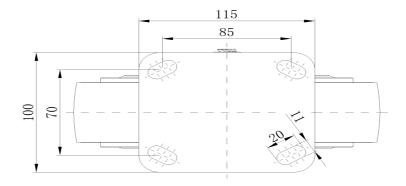

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.