1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

QPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm

EAN


KS-11410800534013

Casters with Side Brakes and Locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel Tread: Made of high-quality polyurethane

Wheel center: iron core/cast iron

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 8 "
Wheel Width 2 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 4-9/16 " x 4 "

 Bolt Hole Spacing
 3-3/8 " x 2-3/4 "

 Plate Hole
 13/16 " x 3/8 "

 Offset
 1-3/4 "

 Swivel Interference
 11-1/2 "

 Overall Height
 9-1/2 "

 Swivel Radius
 5-13/16 "

Load Capacity (Dynamic) 1477lbs

Load Capacity (Static) 2216lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Side Brake

92±5° Shore A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 11.9lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

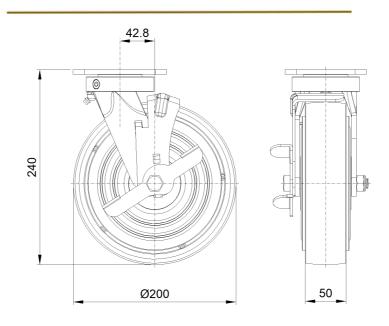

Mounting

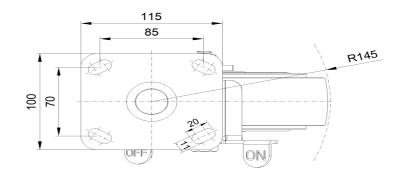

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.