1141 Kingpinless Caster Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 200 x 50mm


EAN

KS-11410800554123

Casters with Front Brake locking system, Welded Caster Fork Zine-Plated, Mounting Type - Top Plate, 85x70 Bolt Hole Spacing Cast Iron Wheel Center, High Quality Polyurethane tread, Cast Iron brown Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 200mm
Wheel Width 50mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 115 x 100mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 20 x 11mm Offset 42.8mm 338mm Swivel Interference Overall Height 240mm **Swivel Radius** 169mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 5.61kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


••••

Operating Noise


• • • •

Floor Surface Preservation • • • • •

Dimensions

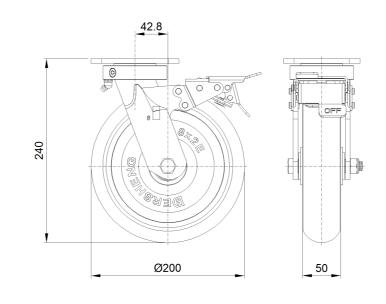

Mounting

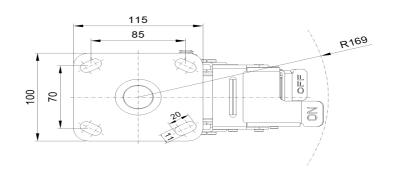

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.