# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

CPD Wheel Diameter × Wheel Width 100 x 32mm


EAN

KS-11420400294011

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

### ● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 12mm Offset 42mm Swivel Interference 316mm Overall Height 170mm **Swivel Radius** 158mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 200kgs
Load Capacity (Static) 300kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.91kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance


Operating Noise • • •

Floor Surface Preservation  $\bullet \bullet \circ \circ$ 

### Dimensions

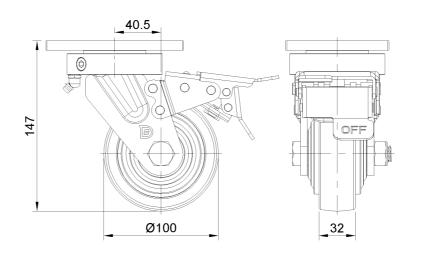

## Mounting

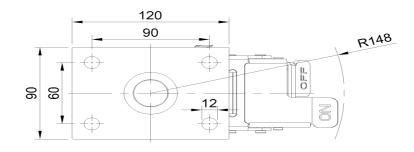

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.