1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

PU (Red arc) Wheel Diameter × Wheel Width 100 x 34mm

EAN


KS-11420400332111

Swivel Caster with Welded Caster Fork Blue painted finish, Mounting Type - Top Plate, 90 x 60 Bolt Hole Spacing Cast Iron Wheel Center with High Quality Polyurethane tread, Cast Iron red Bearing—Ball Bearing

Wheel tread: Made of high-quality polyurethane

Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 34mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 120 x 90mm **Bolt Hole Spacing** 90 x 60mm Plate Hole 12mm Offset 40.5mm Swivel Interference 184mm Overall Height 148.4mm **Swivel Radius** 92mm Hardness Of Tread 93±5° Shore A

Load Capacity (Dynamic) 250kgs

Load Capacity (Static) 375kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 2.59kgs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

Dimensions

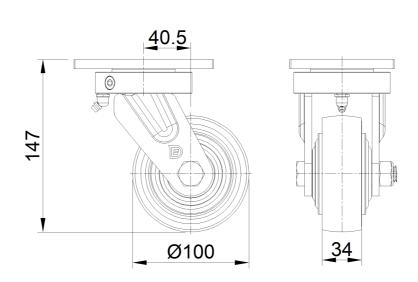

Mounting

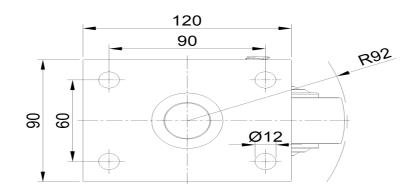

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.