1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

ZQPU (brown round) Wheel Diameter x Wheel Width 100 x 22 (46.5) mm


EAN

KS-11420400802021

Portable Casters, Welded Caster Fork, blue paint finish
Base plate Mounting Type device, 90 x 60mm Bolt Hole Spacing
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
Bearings—specially designed precision balls to reduce Rolling Resistance
ZQPU dual wheels, Ergonomic design designally designed for easier starting and turning

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 100mm
Wheel Width 46.5mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 120 x 90mm **Bolt Hole Spacing** 90 x 60mm Plate Hole 12mm Offset 40.5mm Swivel Interference 184mm Overall Height 147mm **Swivel Radius** 92mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic)335kgsLoad Capacity (Static)502.5kgsTemperature-20°C to +70°CFork TypeSwivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.23kgs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation

Dimensions

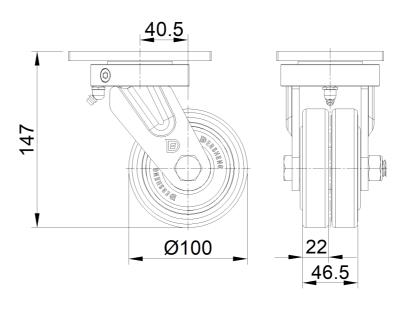

Mounting

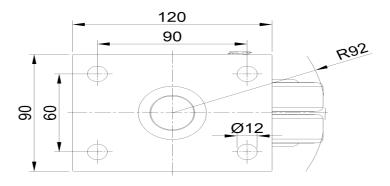

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.