1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

ZQPU (brown round) Wheel Diameter x Wheel Width 100 x 22 (46.5) mm

EAN


KS-11420400802021

Portable Casters, Welded Caster Fork, blue paint finish
Base plate Mounting Type device, 90 x 60mm Bolt Hole Spacing
Cast Iron Wheel Center, High Quality Polyurethane Wheel Tread, Cast Iron brown
Bearings—specially designed precision balls to reduce Rolling Resistance
ZQPU dual wheels, Ergonomic design designally designed for easier starting and turning

Wheels With Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

Wheel Bearing

● Imperial ○ Metric

Wheel Diameter 4 "

Wheel Width 1-7/8

Plate Size 4-13/16 " x 3-9/16 "

Bolt Hole Spacing 3-9/16 " x 2-3/8 "

Plate Hole 1/2 "

Offset 1-5/8 "

Swivel Interference 7-3/8 "

Overall Height 5-7/8 "

Swivel Radius 3-11/16 "

Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 739lbs

Load Capacity (Dynamic) 739lbs

Load Capacity (Static) 1108lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.1lbs

Standard ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

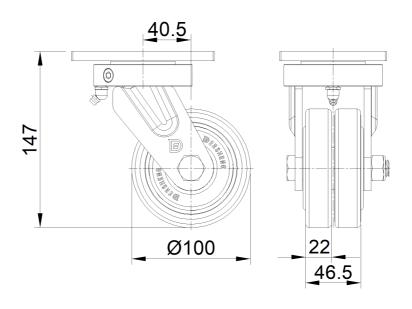

Mounting

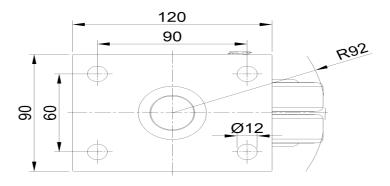

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.