# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

CPD Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11420500294011

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

#### Technical Data

● Imperial ○ Metric

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

5-9/16 " x 4-3/8 " Plate Size **Bolt Hole Spacing** 4-5/16 " x3" 7/8 " x 9/16 " Plate Hole Offset 1-11/16 " 12-1/2 " Swivel Interference Overall Height 6-13/16" 6-5/16" Swivel Radius Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 551lbs

Load Capacity (Static) 827lbs

Temperature 4°F to +140°F

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 7.5lbs

Standard ISO22883

### Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • • •

### **Dimensions**

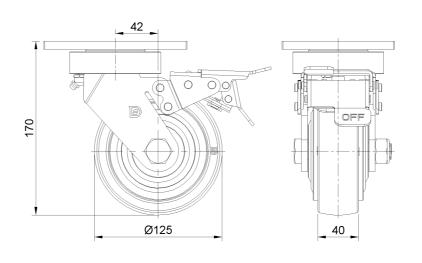

## Mounting

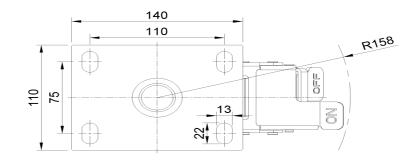

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.