# 1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm

EAN

KS-11420500554111

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

### Technical Data

● Metric ○ Imperial

Wheel Diameter 125mm
Wheel Width 040mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 13 x 22mm Offset 42mm Swivel Interference 316mm Overall Height 170mm **Swivel Radius** 158mm Hardness Of Tread 92±5° Shore A

Load Capacity (Dynamic) 450kgs
Load Capacity (Static) 675kgs

Temperature -20°C to +70°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 4.55kgs

Standard ISO22883


### Advantages at a glance

Rolling Resistance


Operating Noise

Floor Surface Preservation • • • • •

#### **Dimensions**

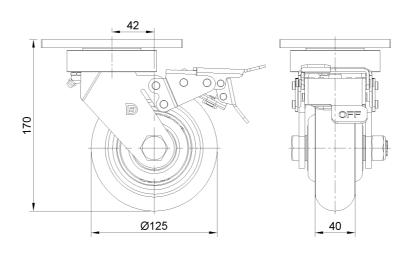

## Mounting

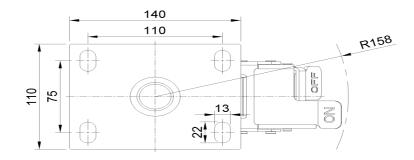

<sup>\*</sup> For any deviation between metric and imperial spec, please refer to the metric spec.