1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

EQPU (brown round) Wheel Diameter x Wheel Width 125 x 40mm


EAN

KS-11420500554111

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Cast Iron core, High Quality Polyurethane Wheel Tread Cast Iron brown, Bearing—Ball Bearings

Wheel tread: Made of high-quality polyurethane Wheel Center: iron core/cast iron core

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Imperial ○ Metric

Hardness Of Tread

Wheel Diameter 5 "

Wheel Width 1-5/8 "

Wheel Bearing Wheels With Ball Bearings

 Plate Size
 5-9/16 " x 4-3/8 "

 Bolt Hole Spacing
 4-5/16 " x3"

 Plate Hole
 9/16 " x 7/8 "

 Offset
 1-11/16 "

 Swivel Interference
 12-1/2 "

 Overall Height
 6-13/16 "

 Swivel Radius
 6-5/16 "

Load Capacity (Dynamic) 992lbs

Load Capacity (Static) 1488lbs

Temperature -4°F to +158°F

Fork Type Swivel Caster With Front Brake

92±5° Shore A

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 10.0lbs

Standard ISO22883


Advantages at a glance

Rolling Resistance


Operating Noise • • • •

Floor Surface Preservation • • • • •

Dimensions

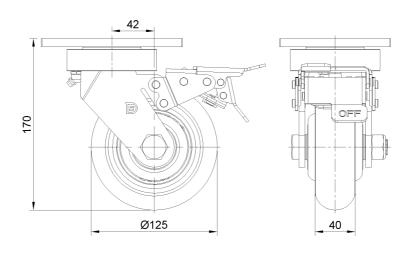

Mounting

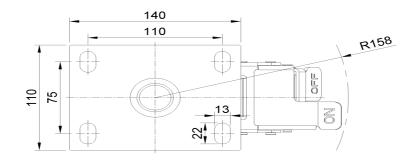

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.