1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

CPD Wheel Diameter x Wheel Width 150 x 40mm

EAN

KS-11420600292031

Swivel Casters, Welded Caster Fork Surface sprayed with blue paint, Mounting Type - Top Plate, Hole spacing 85x70 Polypropylene Wheel Center, Wheel Tread Natural Color Bearing—Ball Bearing, with special Anti-thread wheel covers

Wheel Tread: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 40mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 85 x 70mm Plate Hole 22 x 13mm Offset 42mm 240mm Swivel Interference Overall Height 197mm **Swivel Radius** 120mm Hardness Of Tread 72±5° Shore D Load Capacity (Dynamic) 350kgs

Load Capacity (Dynamic) 350kgs

Load Capacity (Static) 600kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster

Stainless N/A

Electrical Conductivity

Anti-Static

N/A

Weight

3.44kgs

Standard

ISO22883

Advantages at a glance


Rolling Resistance

Operating Noise


Floor Surface Preservation

• • • • •

Dimensions

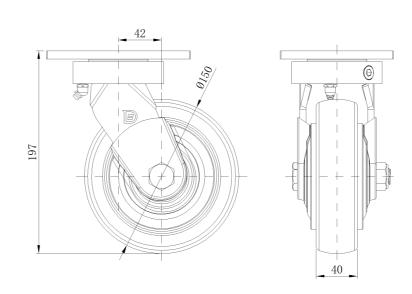

Mounting

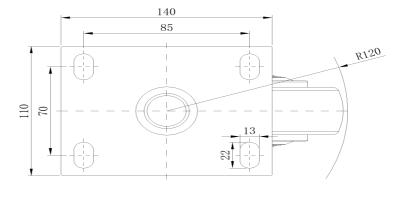

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.