1142 Kingpinless Caster (B Type) Series

Dersheng Casters Keep Rolling

CPD Wheel Diameter x Wheel Width 150 x 40mm


EAN

KS-11420600294051

Casters with front brake and With locking system, Welded Caster Fork Blue-painted finish, Mounting Type - Top Plate, 110x75 Bolt Hole Spacing Polypropylene Wheel Center, natural Wheel Tread Bearings—Ball Bearings

Wheel surface: PP polypropylene Wheel Center: PP polypropylene

Drawings are for reference only and may differ from the product



Picture may differ from original product

Technical Data

● Metric ○ Imperial

Wheel Diameter 150mm
Wheel Width 040mm

Wheel Bearing Wheels With Ball Bearings

Plate Size 140 x 110mm **Bolt Hole Spacing** 110x75mm Plate Hole 13 x 22mm Offset 42mm 320mm Swivel Interference Overall Height 197mm **Swivel Radius** 160mm Hardness Of Tread 72±5° Shore D

Load Capacity (Dynamic) 350kgs
Load Capacity (Static) 525kgs

Temperature -12°C to +60°C

Fork Type Swivel Caster With Front Brake

Stainless N/A

Electrical Conductivity N/A

Anti-Static N/A

Weight 3.73kgs

Standard ISO22883

Advantages at a glance

Rolling Resistance


• • • •

Operating Noise


 \bullet \bullet \circ \circ

Floor Surface Preservation $\bullet \bullet \circ \circ$

Dimensions

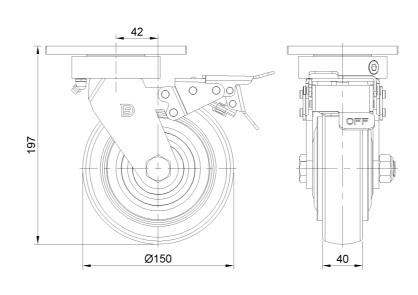

Mounting

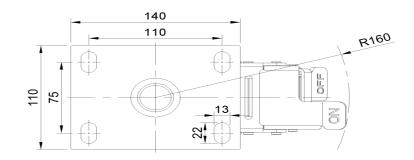

^{*} For any deviation between metric and imperial spec, please refer to the metric spec.